



US 20220301732A1

(19) **United States**

(12) **Patent Application Publication**

VENNERI et al.

(10) **Pub. No.: US 2022/0301732 A1**

(43) **Pub. Date: Sep. 22, 2022**

(54) **NUCLEAR REACTOR CORE ARCHITECTURE WITH ENHANCED HEAT TRANSFER AND SAFETY**

G21C 3/322 (2006.01)
G21C 1/20 (2006.01)
G21C 15/08 (2006.01)
G21C 15/04 (2006.01)

(71) Applicant: **ULTRA SAFE NUCLEAR CORPORATION**, Seattle, WA (US)

(52) **U.S. Cl.**
CPC *G21C 3/626* (2013.01); *G21C 3/041* (2013.01); *G21C 3/322* (2013.01); *G21C 1/20* (2013.01); *G21C 15/08* (2013.01); *G21C 15/04* (2013.01)

(72) Inventors: **Paolo Francesco VENNERI**, Seattle, WA (US); **Michael John EADES**, Seattle, WA (US); **Kelsey SOUZA**, Seattle, WA (US); **Wesley DEASON**, Seattle, WA (US)

(73) Assignee: **ULTRA SAFE NUCLEAR CORPORATION**, Seattle, WA (US)

(57) **ABSTRACT**

(21) Appl. No.: **17/640,033**

(22) PCT Filed: **Oct. 4, 2020**

(86) PCT No.: **PCT/US2020/054190**

§ 371 (c)(1),

(2) Date: **Mar. 3, 2022**


An enhanced architecture for a nuclear reactor core includes several technologies: (1) nuclear fuel tiles (S-Block); and (2) a high-temperature thermal insulator and tube liners with a low-temperature solid-phase moderator (U-Mod) to improve safety, reliability, heat transfer, efficiency, and compactness. In S-Block, nuclear fuel tiles include a fuel shape designed with an interlocking geometry pattern to optimize heat transfer between nuclear fuel tiles and into a fuel coolant and bring the fuel coolant in direct contact with the nuclear fuel tiles. Nuclear fuel tiles can be shaped with discontinuous nuclear fuel lateral facets and have fuel coolant passages formed therein to provide direct contact between the fuel coolant and the nuclear fuel tiles. In U-Mod, tube liners with low hydrogen diffusivity retain hydrogen in the low-temperature solid-phase moderator even at elevated temperatures and the high-temperature thermal insulator insulates the solid-phase moderator from the nuclear fuel tiles.

Related U.S. Application Data

(60) Provisional application No. 62/910,561, filed on Oct. 4, 2019.

Publication Classification

(51) **Int. Cl.**
G21C 3/62 (2006.01)
G21C 3/04 (2006.01)

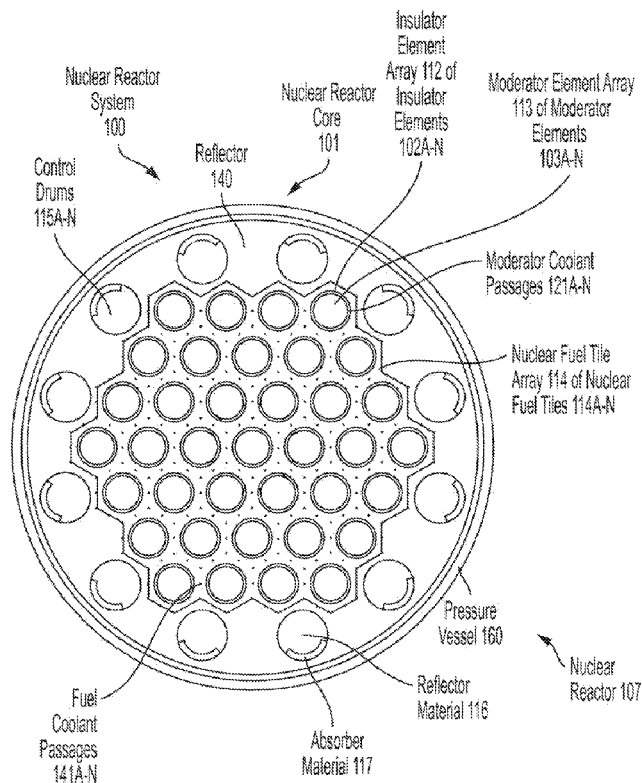

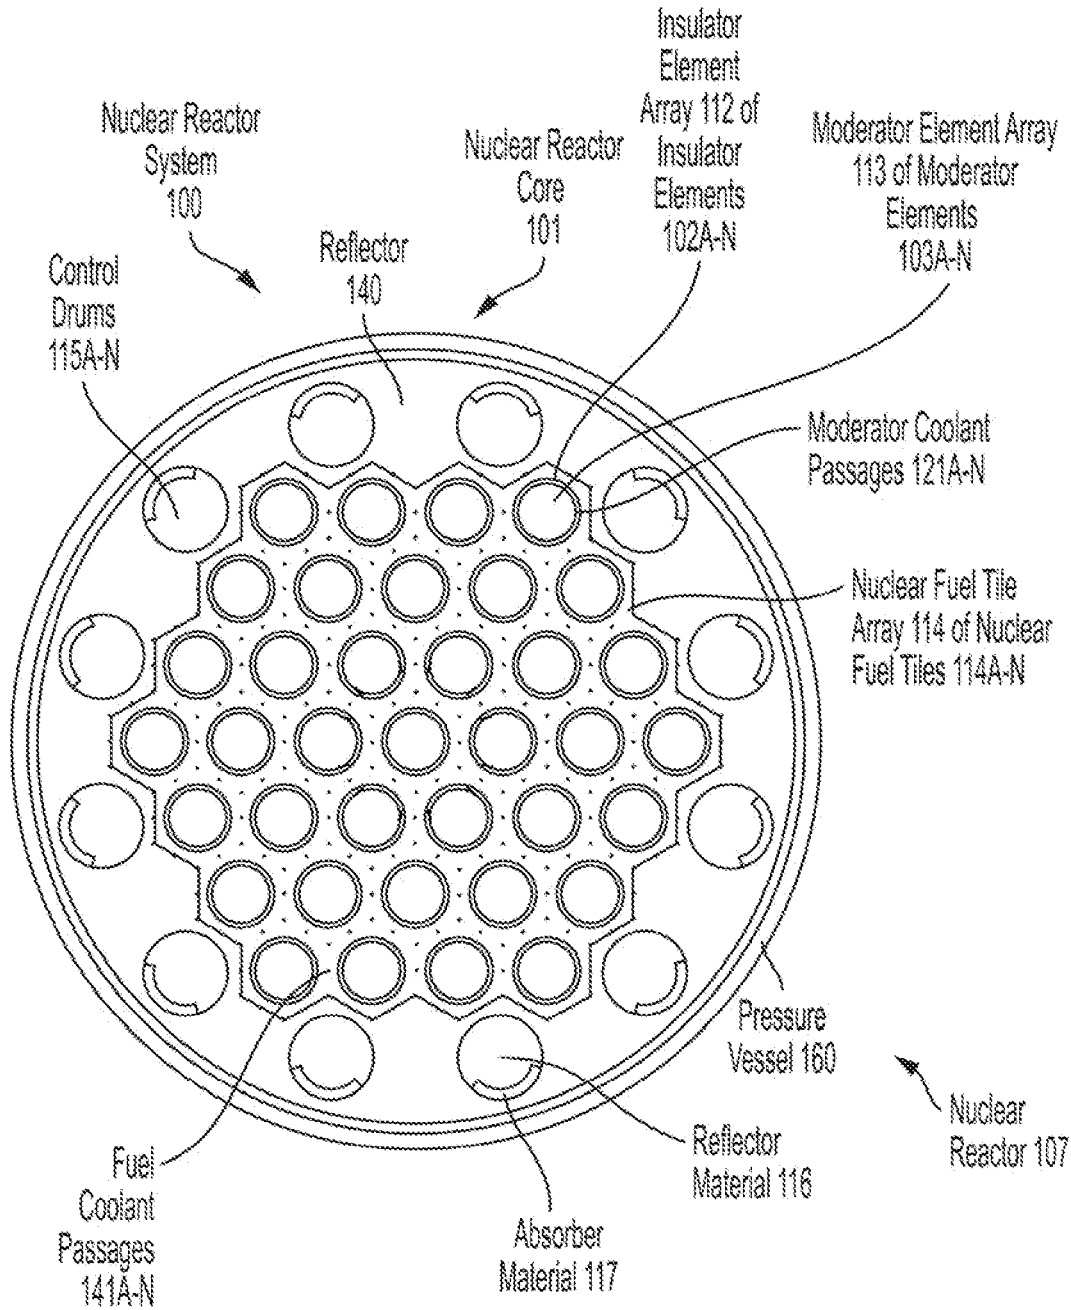


FIG. 1

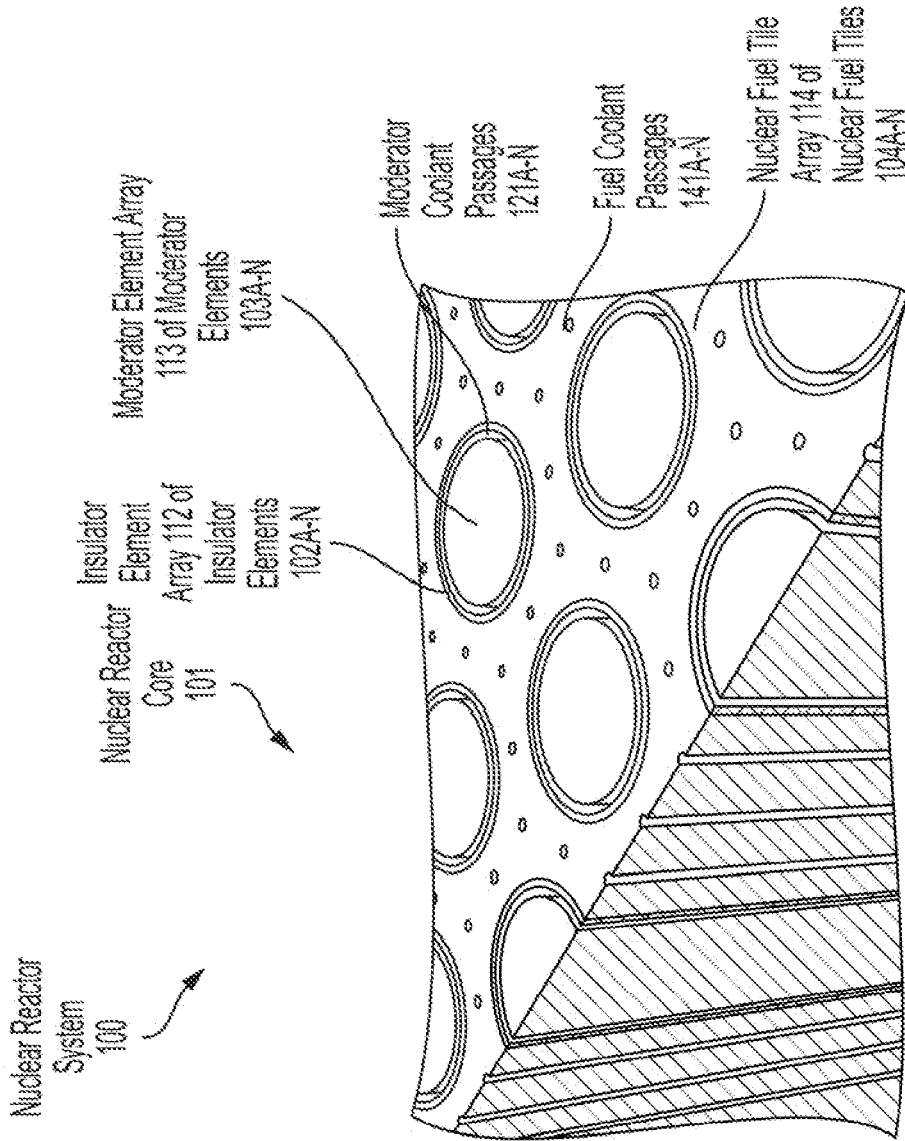


FIG. 2

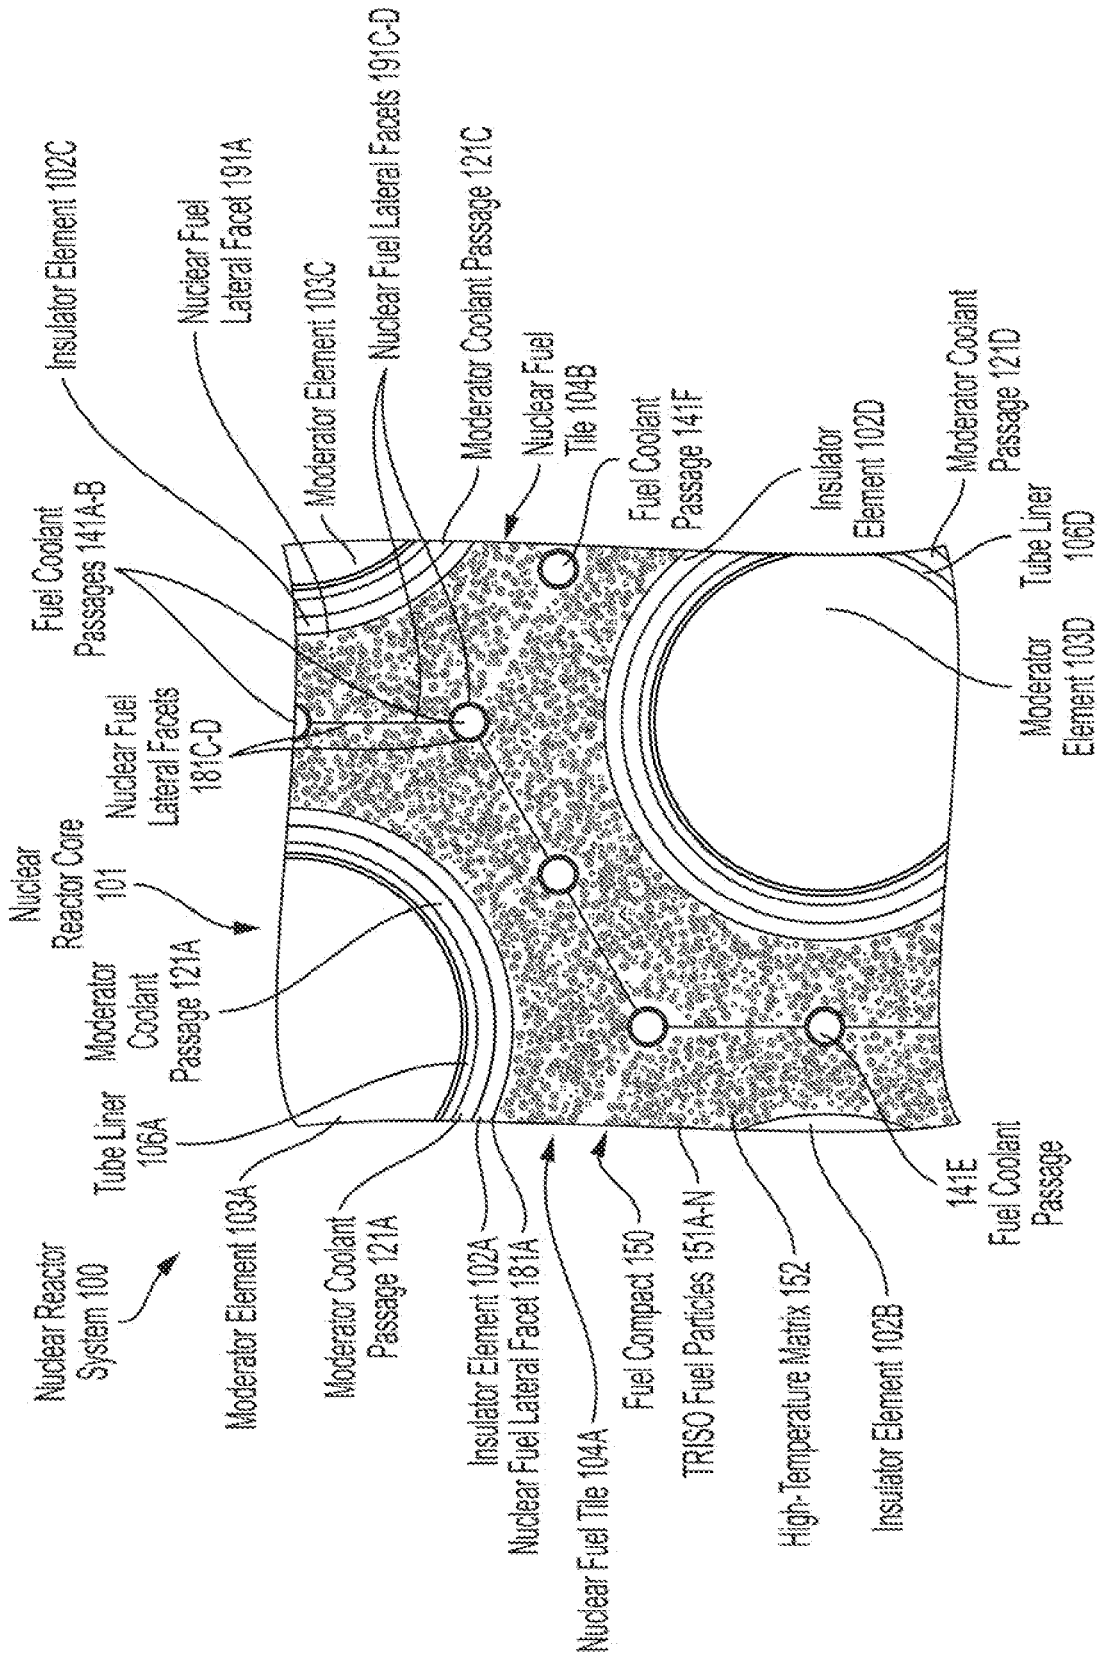


FIG. 3

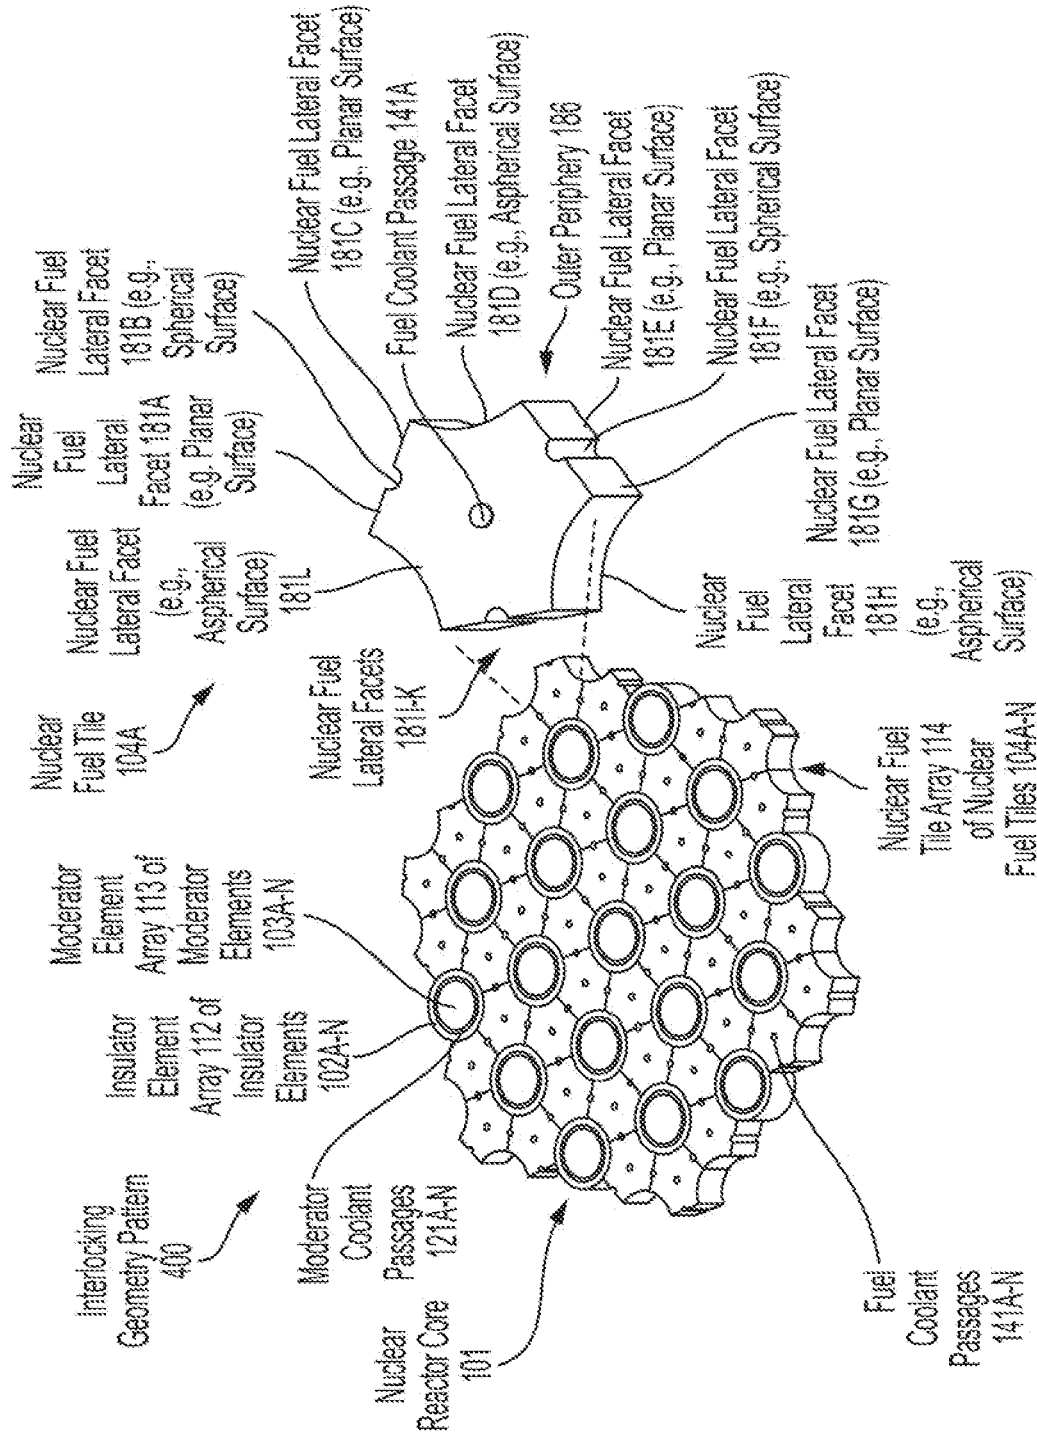


FIG. 4A

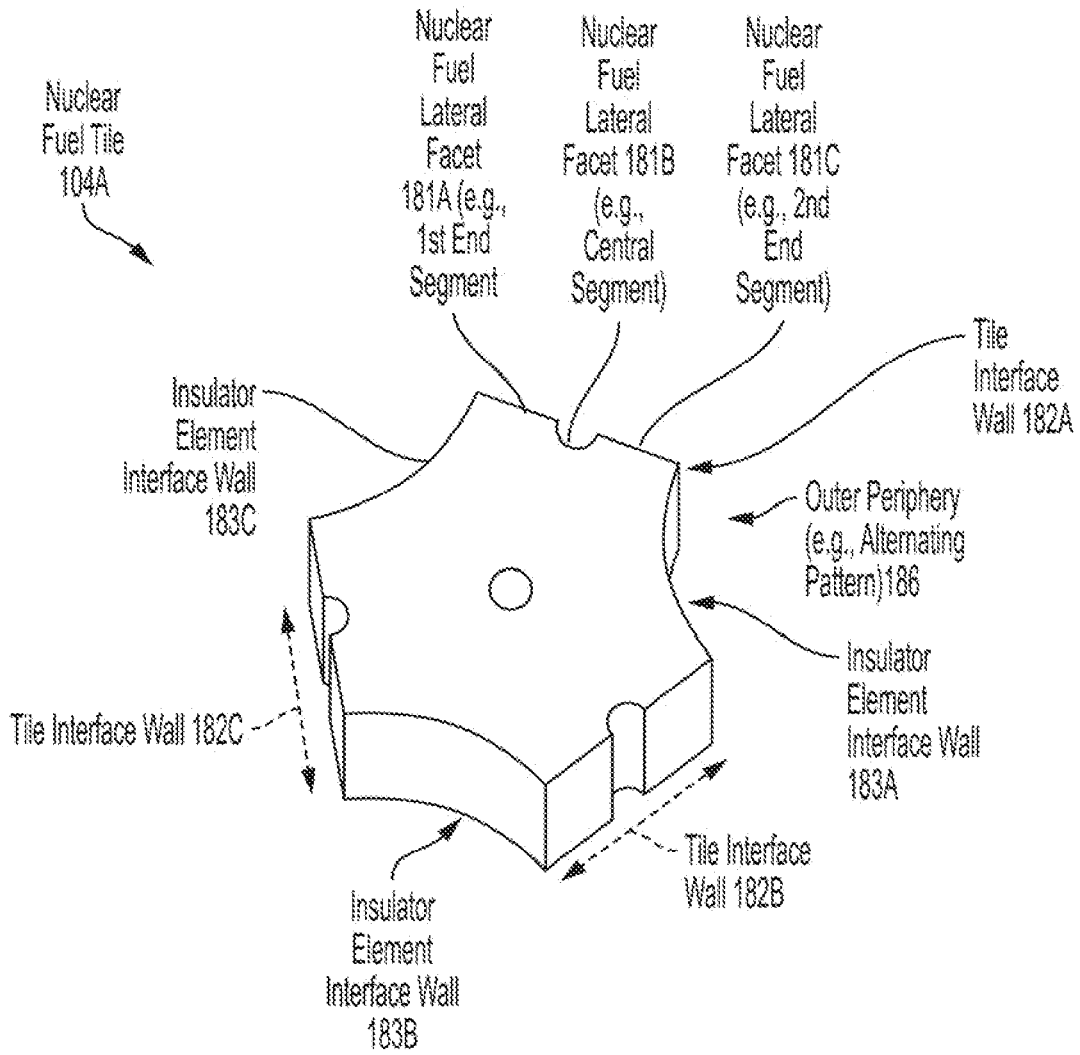


FIG. 4B

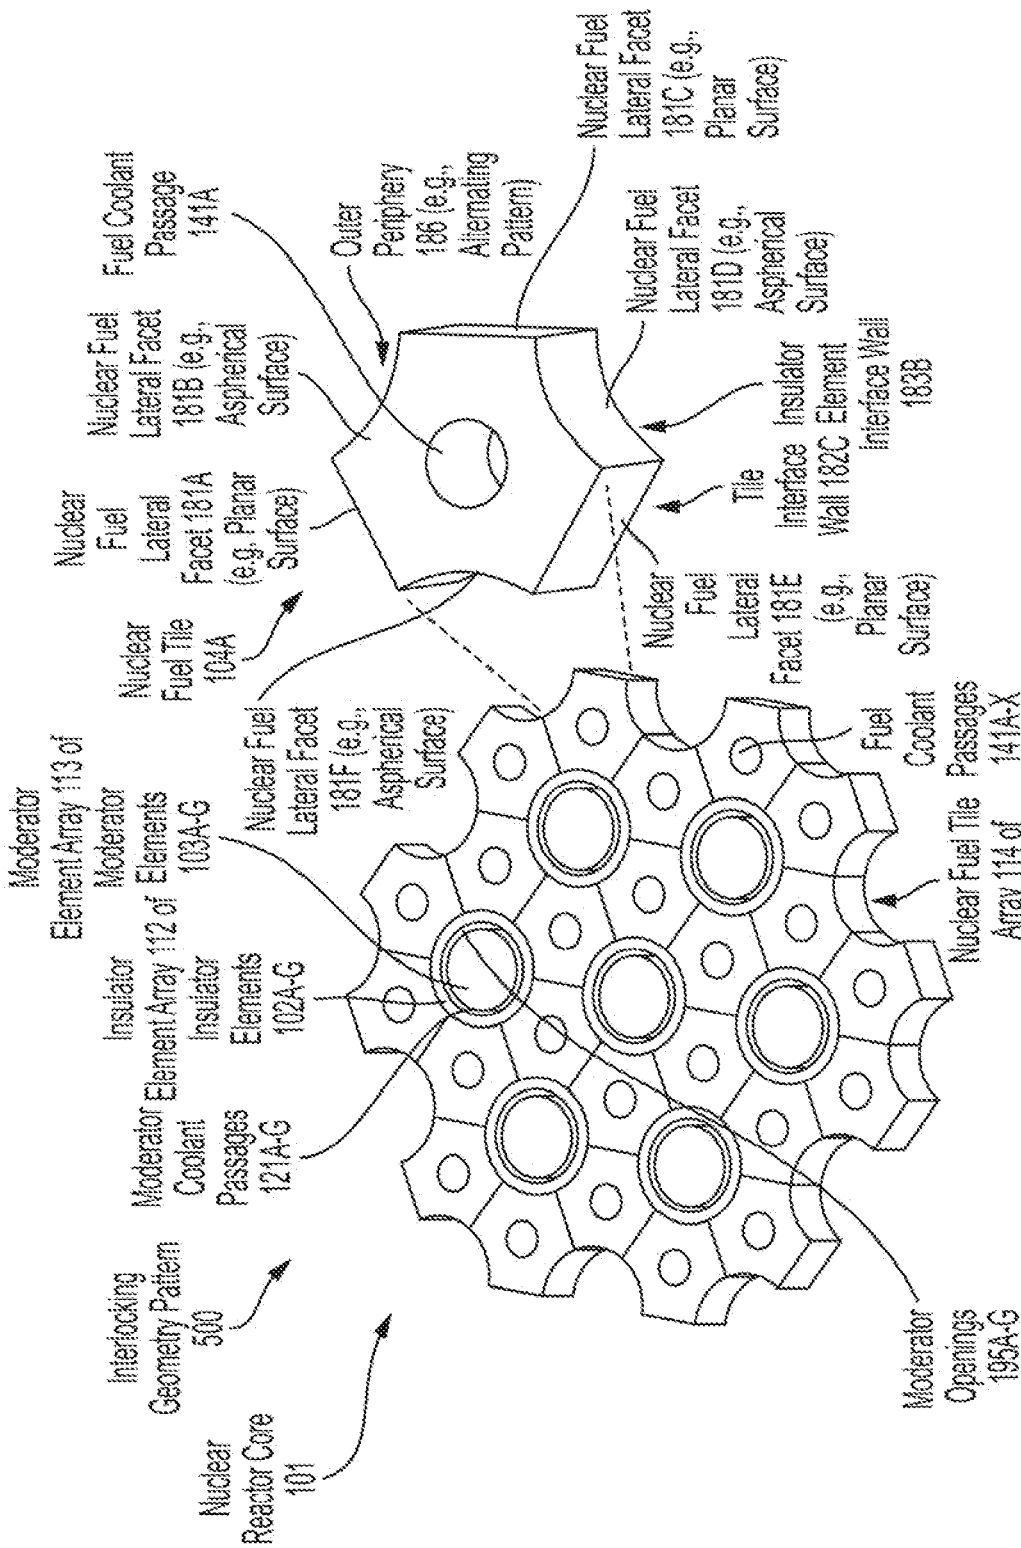


FIG. 5

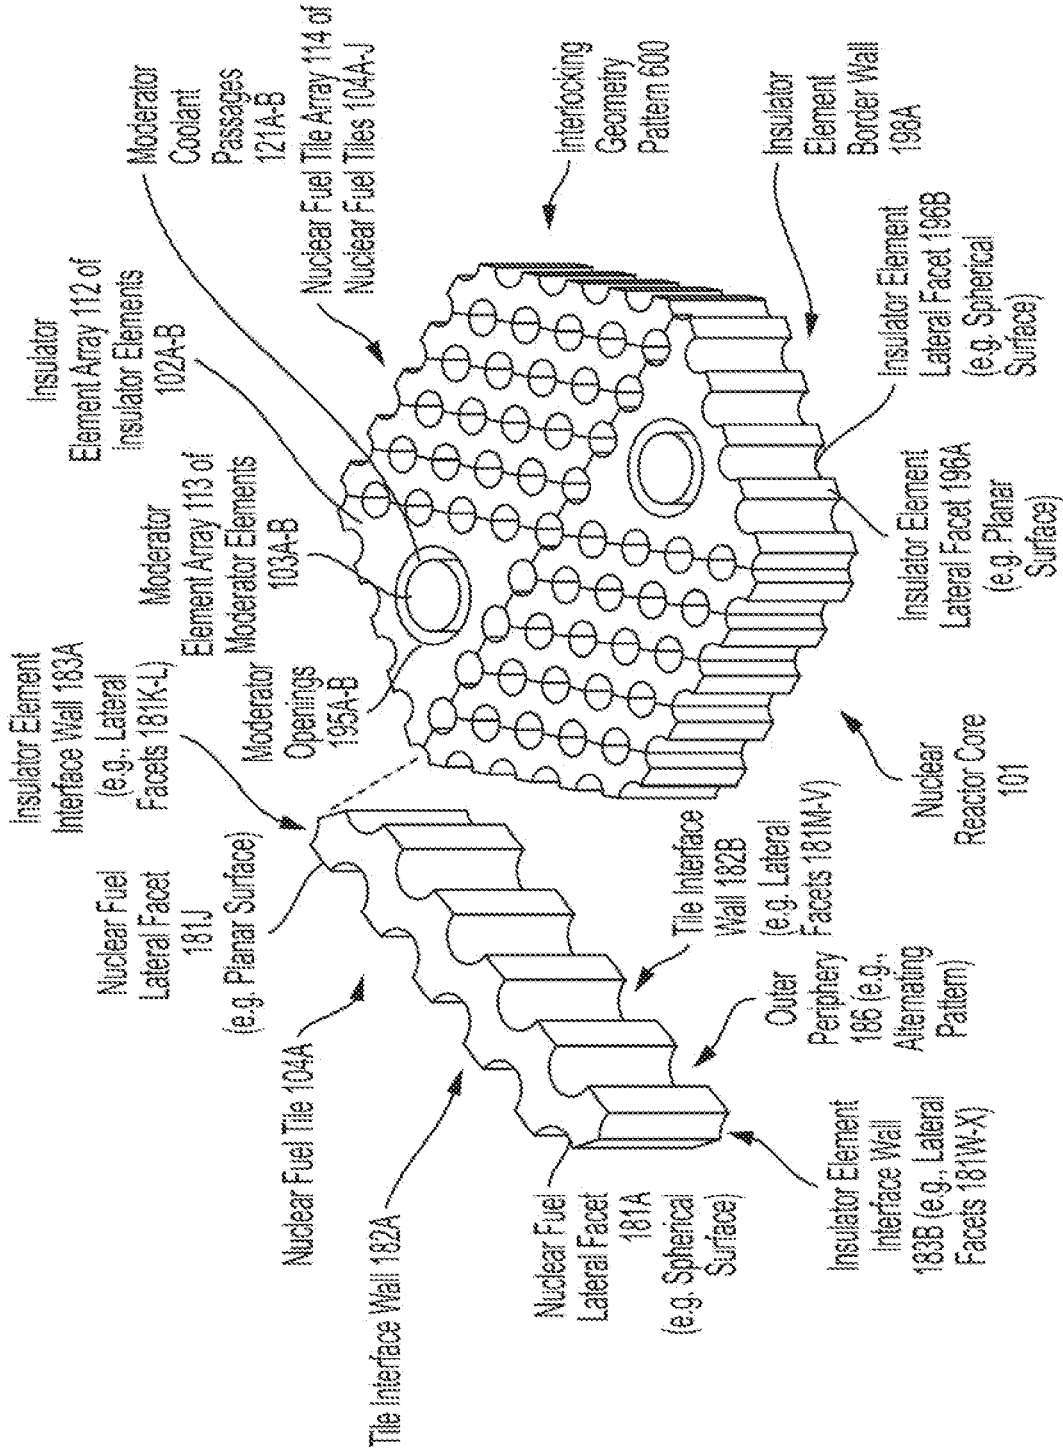


FIG. 6

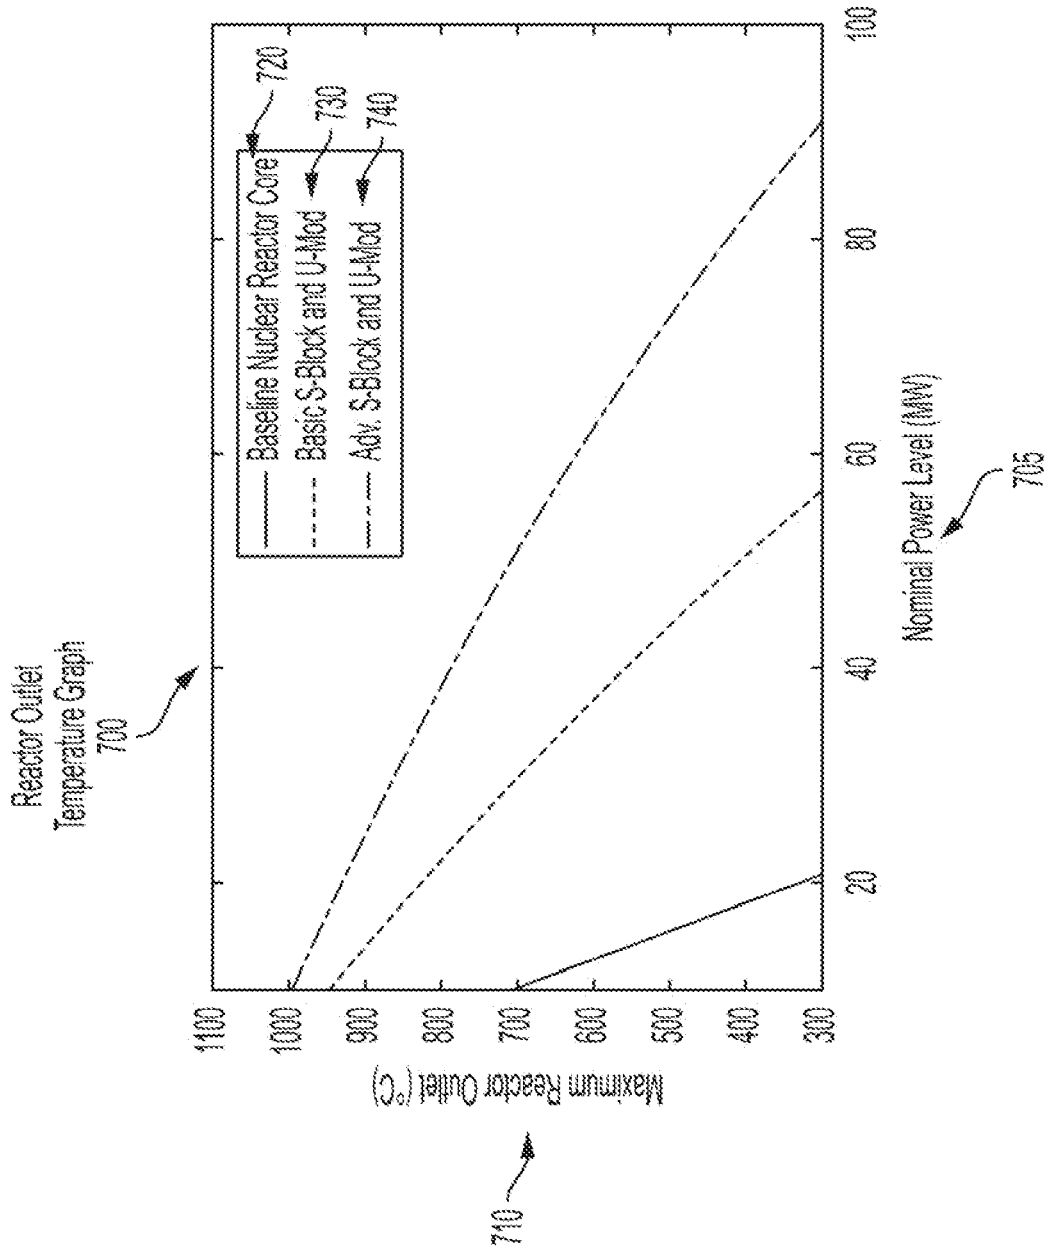


FIG. 7

U-Mod Physical Property Table ← 800
 Candidate High-Temperature Thermal Insulators 802A-B to Form Insulator Elements 102A-N and
 Candidate Low-Temperature Solid-Phase Moderators 803A-F to Form Moderator Elements 103A-N as Compared to Graphite 810

Candidate Material	Slowing Down Power $\zeta\Sigma_s$	T _{melt} (T _{decomp}) °C	Density (g/cc)	Chemical Reactivity (O ₂ , N ₂ , H ₂ O)	Crystal	Irrad. Perf. (~500°C, >20 dpa)	Therm. Cond. (@-650°C) W/m-K
810 Graphite	0.077	>(3000)	1.8	O ₂ :Rx@>800C	Hexag.	Poor	~20
802A CVD SiC	0.044	(2860)	3.2	Very Low	Cubic	Excellent	~80
803A ZrH	0.859	>(850)	5.66	Mildly High	Cubic	unknown	~17
802B MgO	0.060	2853	3.58	Mildly High	Cubic	Excellent	~50
803B Be ₂ C	0.125	(~2100)	1.9	N/Rx@>1100C O ₂ :Rx@>800C	Cubic	unknown	~22
803C ZrBe13	0.129	1525	2.72		Cubic	unknown	~40
803D TiBe12	0.138	1925	2.26		Hexag.	unknown	
803E BeO	0.124	2507	3.015	Very Low	Hexag.	Very Bad, anisotropic	~30
803F Be	0.16	1287	1.85	O ₂ :Rx@>500C	Hexag.	Bad	~60

FIG. 8

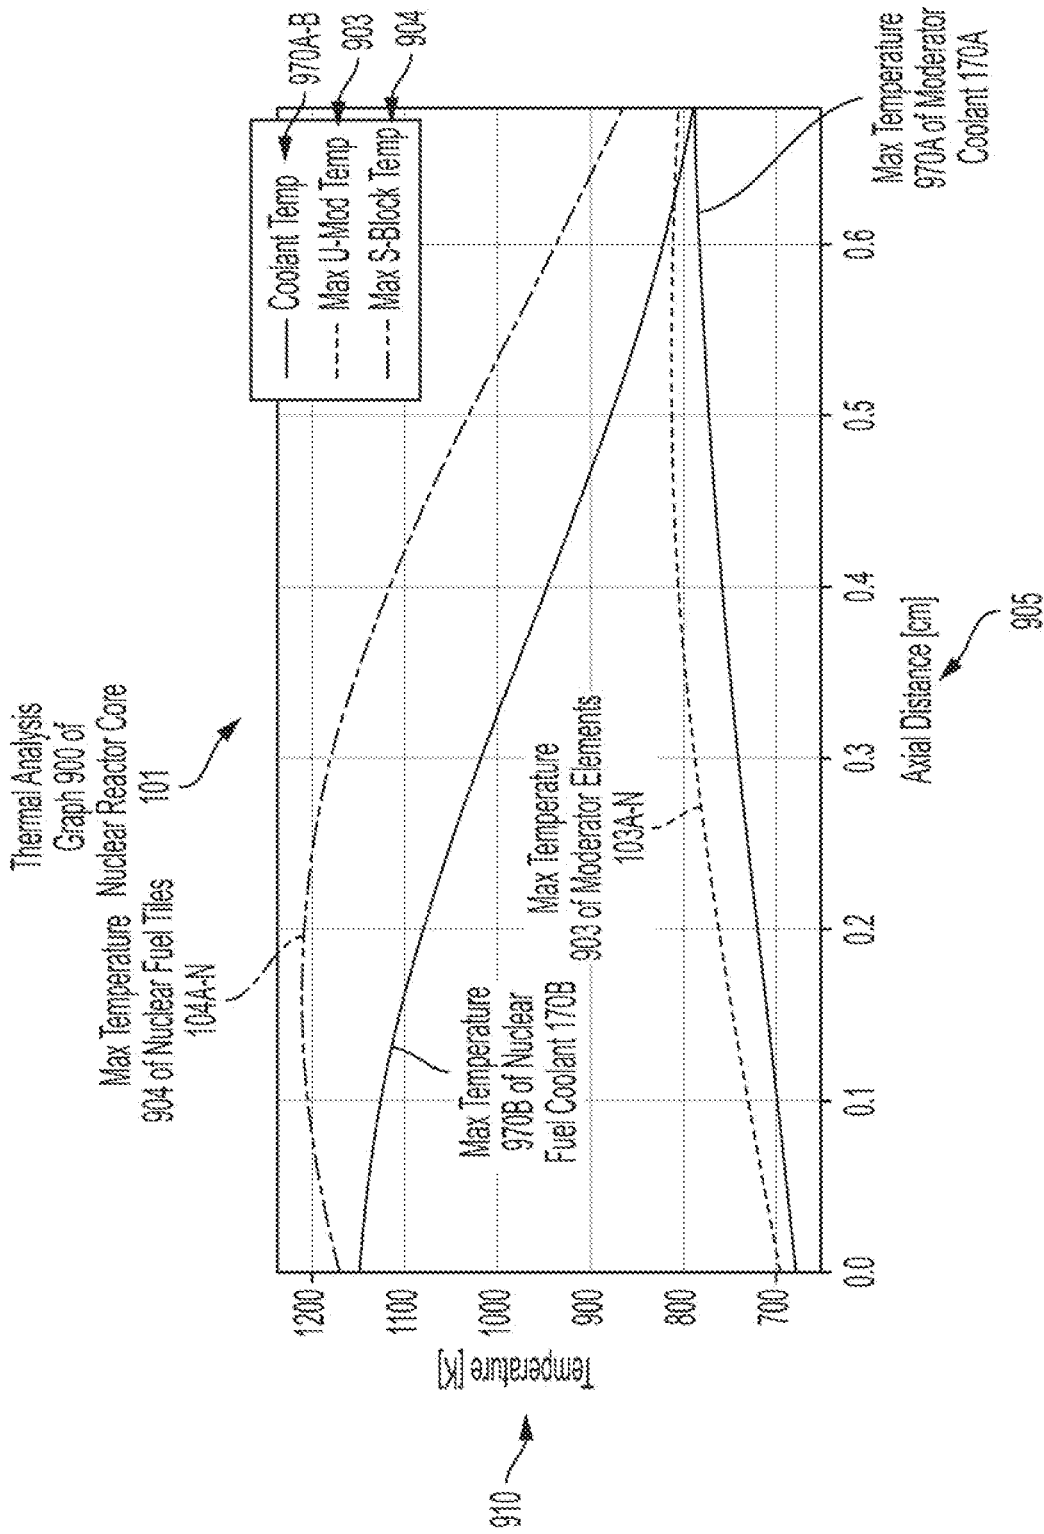


FIG. 9

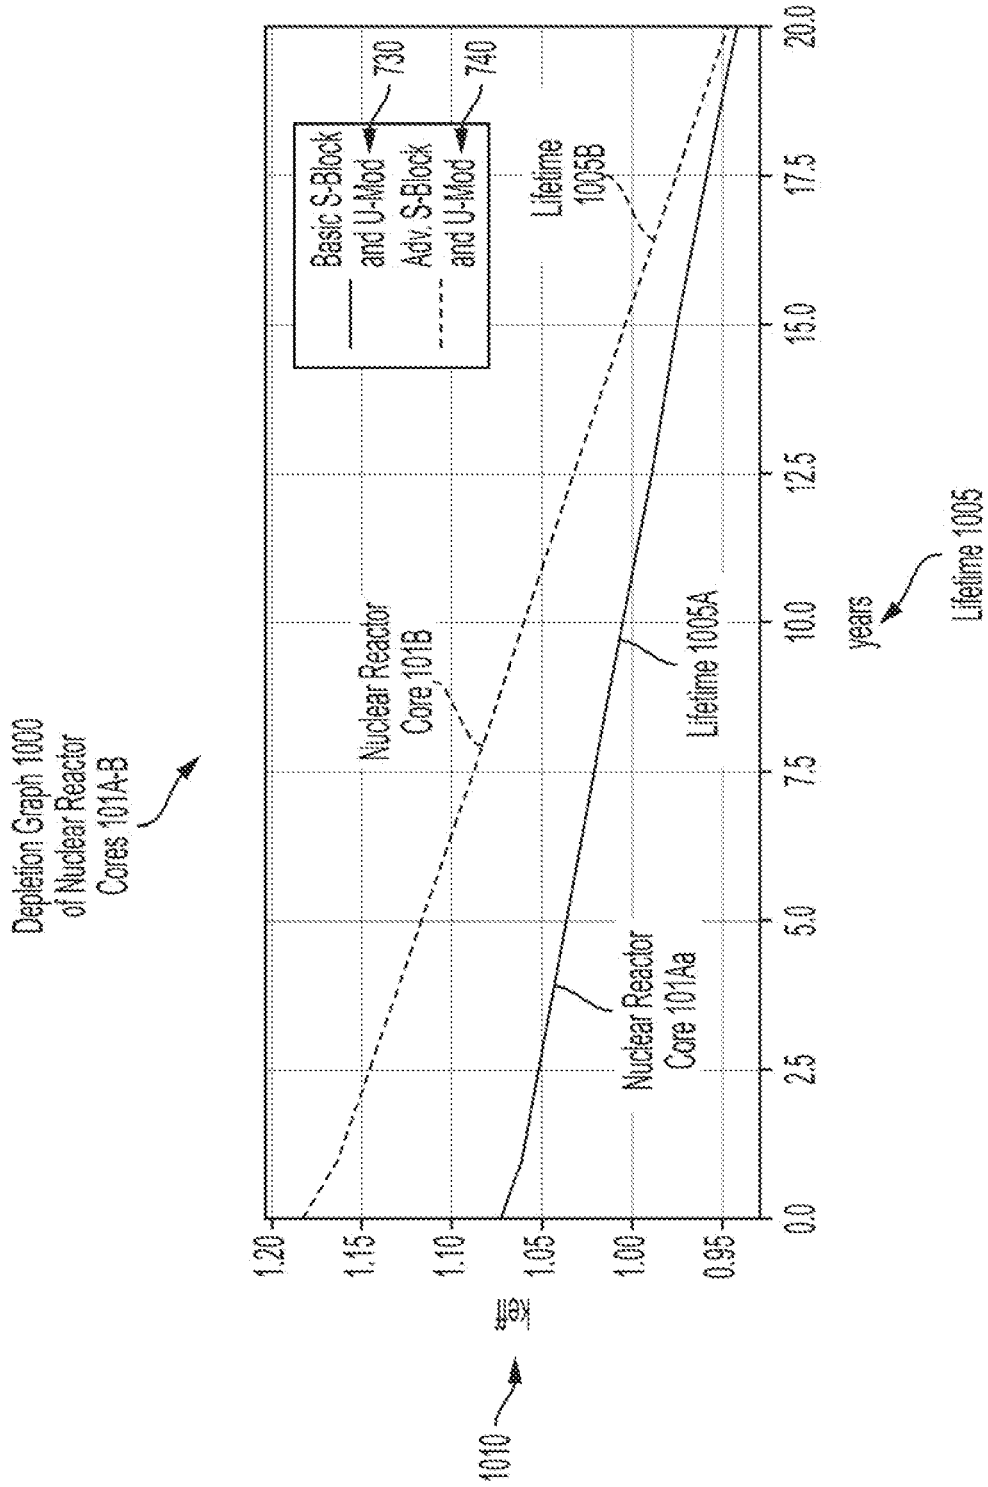


FIG. 10

Nuclear Reactor Core Performance and Properties Comparison Table 1101

	Nuclear Reactor Systems 1100A-F	Nuclear Reactor Mass (kg) 1105A-F	Power Level (kWe) 1106A-F	Power per Mass (W/kg) 1107A-F	Outlet Temp. (K) 1108A-F	U-235 Enrichment 1109A-F
1100A	Basic S-Block and U-Mod 730	1,500	150	100	1,150	LEU
1100B	Adv. S-Block and U-Mod 740	3,000	1,000	333	1,150	LEU
1100C	NASA Fission Surface System	1,400	40	16	850	HEU
1100D	JIMO Reactor	1,600	200	125	1,150	HEU
1100E	KiloPower Derived System	3,000	200	67	~1,000	LEU
1100F	Megapower	22,000	2,000	91	~1,000	LEU

FIG. 11

**NUCLEAR REACTOR CORE
ARCHITECTURE WITH ENHANCED HEAT
TRANSFER AND SAFETY**

CROSS-REFERENCE TO RELATED
APPLICATIONS

[0001] This application claims priority to U.S. Provisional Patent Application No. 62/910,561, filed on Oct. 4, 2019, titled “Nuclear System for Power Production in Space,” the entirety of which is incorporated by reference herein.

[0002] This application relates to International Application No. PCT/US2020/XXXXXX, filed on Oct. 4, 2020, titled “Integrated In-Vessel Neutron Shield,” the entirety of which is incorporated by reference herein. This application also relates to International Application No. PCT/US2020/XXXXXX, filed on Oct. 4, 2020, titled “Automatic Shutdown Controller for Nuclear Reactor System with Control Drums,” the entirety of which is incorporated by reference herein.

TECHNICAL FIELD

[0003] The present subject matter relates to examples of nuclear reactor systems and nuclear reactors for power production and propulsion, e.g., in remote regions, such as outer space. The present subject matter also encompasses a nuclear reactor core architecture that includes nuclear fuel tiles and a low-temperature solid-phase moderator.

BACKGROUND

[0004] Nuclear fission reactors include thermal or fast type reactors. Currently, almost all operating nuclear fission reactors are thermal. Nuclear fission reactors include nuclear fuel inside a nuclear reactor core and a moderator to slow down fast neutrons so that nuclear fission can continue. Typically, the nuclear fuel is formed in cylindrical shaped fuel compacts or pellets. The fuel compacts are loaded into fuel pins or rods, clad, and stacked inside the numerous columns of fuel elements in the nuclear reactor core. Unfortunately, such a nuclear fuel geometry does not maximize heat transfer from the nuclear fuel into a coolant and is restrictive in terms of imposing limits in the geometry of the nuclear reactor core.

[0005] In current high-temperature reactor designs of nuclear fission reactors, the cooling path and/or heat removal mechanism is shared between the nuclear fuel and the moderator. This means that any solid neutron moderator must be able to withstand the same high-temperature environment as the nuclear fuel. This issue is avoided in current designs of nuclear reactors by typically using graphite (C) as the neutron moderator or eschewing the use of a neutron moderator altogether.

[0006] Graphite is a crystalline form of the element carbon with atoms arranged in a hexagonal structure that is naturally occurring. Graphite is the most stable form of carbon under standard conditions. Graphite has a low neutron absorption cross-section, but a comparatively large neutron scattering cross-section. The neutron scattering cross-section (σ_s) for graphite is 4.7 barns and the neutron absorption cross-section (σ_a) for graphite is 0.0035 barns.

[0007] Today, a number of gas-cooled systems (e.g., prismatic or pebble-bed) and salt-cooled systems assume very large graphite moderated nuclear reactor core loadings. While there has been continual refinement in methods to

process graphite as a single moderating material, providing both higher purity and better—more isotropic forms of graphite—a hard moderator lifetime limit remains for graphite. Essentially, the physics of irradiation-induced anisotropic crystal swelling leads to gross dimensional change of the graphite moderator material, microcracking, and loss of integrity of the graphite moderator material. Typical high-temperature gas-cooled reactors (HTGR) of approximately 200 megawatt electrical (MWe) have an associated graphite loading of approximately 600 tons. Newly anticipated salt-cooled systems will have similarly large graphite waste streams.

[0008] Unfortunately, contaminated graphite poses serious waste issues for these nuclear reactor systems as evidenced by the approximately 250,000 tons of graphite waste disposed of to date. While the level of contamination is dependent on the nuclear reactor system, nuclear fuel, and nuclear fuel quality, carbon-14 (^{14}C) and ^3T contamination are unavoidable. This nuclear waste issue is compounded by the fact that the graphite moderator lifetime for high-power (high neutron influence) systems mandate in-service change-out of significant volumes of the nuclear reactor core. Accordingly, improvements to moderators for a nuclear reactor core are needed.

[0009] Traditionally, in the field of nuclear systems for space applications, e.g., nuclear thermal propulsion (NTP), the power system utilizes “weapons grade materials” or “weapons grade nuclear fuel.” Such weapons grade nuclear fuel is highly-enriched uranium enriched in Uranium-235 above twenty percent or comparable fissile material compositions. This not only induces a proliferation risk, but also prevents privately owned entities from developing and/or operating the system.

[0010] Non-nuclear systems, such as solar, wind, fossil fuel, chemical, and geothermal power systems are an alternative option to nuclear, but require a continuous fuel supply line and complex cumbersome physical apparatuses for their operation, as well as periodic maintenance throughout their lifetime. Furthermore, such non-nuclear systems have a low power density, which results in large heavy power systems, which prevents their use in outer space because of the inherent difficulty associated with launching heavy payloads and large objects into and beyond Earth orbit.

[0011] Nuclear systems have a higher power per unit mass than non-nuclear systems and successful implementation of nuclear systems can enable future exploration and settlement of outer space. However, current nuclear reactor core architectures with non-weapons grade nuclear fuel present roadblocks to commercial and self-sustained settlement of outer space. Accordingly, improvements to nuclear fuel for a nuclear reactor core are needed.

SUMMARY

[0012] The various examples disclosed herein relate to nuclear reactor core technologies for nuclear reactor systems both for space or terrestrial land applications. The nuclear reactor system **100** includes a nuclear reactor core **101** that implements several advantageous technologies: (1) nuclear fuel tiles **104A-N**(S-Block); and (2) a high-temperature thermal insulator **102A-N** and tube liners **106A-N** with a low-temperature solid-phase moderator **103A-N** (U-Mod). S-Block and U-Mod improve safety, accident tolerance, reliability, heat transfer, efficiency, and compactness of the nuclear reactor core **101**.

[0013] In S-Block, nuclear fuel tiles 104A-N include a fuel shape designed with an interlocking geometry pattern to beneficially optimize heat transfer between nuclear fuel tiles 104A-N and into a nuclear fuel coolant 170B and bring the nuclear fuel coolant 170B in direct contact with the nuclear fuel tiles 104A-N. The nuclear fuel tiles 104A-N can be shaped with discontinuous nuclear fuel lateral facets 181A-N and have fuel coolant passages 141A-N formed therein to provide direct contact between the nuclear fuel coolant 170B and the nuclear fuel tiles 104A-N.

[0014] In U-Mod, individual tube liners 106A-N are claddings or coatings around the individual low-temperature solid-phase moderator elements 103A-N. The tube liners 106A-N are formed of materials with low hydrogen diffusivity that are able to retain hydrogen even at elevated temperatures. The moderator elements 103A-N are formed of a low-temperature solid-phase moderator that is thermally insulated from the nuclear fuel tiles 104A-N by the insulator elements 102A-N. Tube liners 106A-N are formed of a hydrogen barrier material with low hydrogen diffusivity for hydrogen retention within the moderator elements 103A-N even at elevated operating temperatures. A combination of moderator coolant passages 121A-N and insulator elements 102A-N enable the moderator elements 103A-N to be at an operating temperature significantly lower than the nuclear fuel tiles 104A-N. U-Mod beneficially provides a cooling path and/or heat removal mechanism for the moderator elements 103A-N that is distinctly separated and thermally insulated from the nuclear fuel tiles 104A-N and the cooling and/or heat removal path for the nuclear fuel tiles 104A-N.

[0015] Moreover, graphite moderated nuclear reactor systems are large and ill-suited for space applications. While graphite has a low neutron absorption, it requires a large quantity to slow down fast neutrons. The ability for a moderator to compactly and effectively slowdown is referred to as macroscopic slowing down power, and graphite has a low macroscopic slowing down power. U-Mod enables the use of moderator that can have a higher macroscopic slowing down power than graphite. Moderators with a higher slowing down power (e.g., ZrH, Be, BeO, etc.) enable a more compact nuclear reactor core 101.

[0016] An example nuclear reactor system 100 that implements S-Block and U-Mod includes a nuclear reactor core 101 that includes an insulator element array 112 of insulator elements 102A-N and a moderator element array 113 of moderator elements 103A-N. A respective moderator element 103A-N is formed of a low-temperature solid-phase moderator disposed inside a respective insulator element 102A-N. The nuclear reactor core 101 further includes a nuclear fuel tile array 114 of nuclear fuel tiles 104A-N. A respective nuclear fuel tile 104A-N includes a plurality of nuclear fuel lateral facets 181A-N that border the respective insulator element 102A-N or another respective nuclear fuel tile 104A-N. The respective moderator element 103A-N is insulated from the nuclear fuel tile array 114 of nuclear fuel tiles 104A-N by the respective insulator element 102A-N.

[0017] Additional objects, advantages and novel features of the examples will be set forth in part in the description which follows, and in part will become apparent to those skilled in the art upon examination of the following and the accompanying drawings or may be learned by production or operation of the examples. The objects and advantages of the present subject matter may be realized and attained by

means of the methodologies, instrumentalities and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The drawing figures depict one or more implementations in accordance with the present concepts, by way of example only, not by way of limitations. In the figures, like reference numerals refer to the same or similar elements.

[0019] FIG. 1 is a cross-sectional view of a nuclear reactor core of a nuclear reactor system.

[0020] FIG. 2 is an isometric view of a portion of the nuclear reactor core of FIG. 1 showing details of moderator coolant passages and fuel coolant passages.

[0021] FIG. 3 is a zoomed-in view of the cross-section of the nuclear reactor core of FIG. 1 depicting details of insulator elements, tube liners, moderator elements, and nuclear fuel tiles.

[0022] FIGS. 4A-B illustrate a first interlocking geometry pattern of the insulator element array of insulator elements, moderator element array of moderator elements, and nuclear fuel tile array of nuclear fuel tiles.

[0023] FIG. 5 illustrates a second interlocking geometry pattern of the insulator element array, moderator element array, and nuclear fuel tile array.

[0024] FIG. 6 illustrates a third interlocking geometry pattern of the insulator element array, moderator element array, and nuclear fuel tile array.

[0025] FIG. 7 is a reactor outlet temperature graph illustrating a maximum reactor outlet temperature and a nominal power level.

[0026] FIG. 8 is a U-Mod physical property table of two candidate high-temperature thermal insulators to form insulator elements and six candidate low-temperature solid-phase moderators to form moderator elements as compared to graphite.

[0027] FIG. 9 is a thermal analysis graph of the nuclear reactor core that implements S-Block and U-Mod showing how temperature varies depending on axial distance.

[0028] FIG. 10 is a depletion graph of the nuclear reactor core that implements S-Block and U-Mod.

[0029] FIG. 11 is a nuclear reactor core performance and properties comparison table comparing nuclear reactor mass, power level, power per mass, outlet temperature, and uranium 235 (U-235) enrichment of six different nuclear reactor systems.

PARTS LISTING

[0030]	100 Nuclear Reactor System
[0031]	101 Nuclear Reactor Core
[0032]	102A-N Insulator Elements
[0033]	103A-N Moderator Elements
[0034]	104A-N Nuclear Fuel Tiles
[0035]	106A-N Tube Liners
[0036]	107 Nuclear Reactor
[0037]	112 Insulator Element Array
[0038]	113 Moderator Element Array
[0039]	114 Nuclear Fuel Tile Array
[0040]	115A-N Control Drums
[0041]	116 Reflector Material
[0042]	117 Absorber Material
[0043]	121A-N Moderator Coolant Passages
[0044]	140 Reflector
[0045]	141A-N Fuel Coolant Passages

[0046]	150 Fuel Compact
[0047]	151A-N TRISO Fuel Particles
[0048]	152 High-Temperature Matrix
[0049]	160 Pressure Vessel
[0050]	170 Coolant
[0051]	170A Moderator Coolant
[0052]	170B Nuclear Fuel Coolant
[0053]	181A-N Nuclear Fuel Lateral Facets
[0054]	182A-N Tile Interface Walls
[0055]	183A-N Insulator Element Interface Walls
[0056]	186 Outer Periphery
[0057]	191A-N Nuclear Fuel Lateral Facets
[0058]	195A-N Moderator Openings
[0059]	196A-N Insulator Element Lateral Facets
[0060]	198A-N Insulator Element Border Walls
[0061]	700 Reactor Outlet Temperature Graph
[0062]	705 Nominal Power Level
[0063]	710 Maximum Reactor Outlet Temperature
[0064]	720 Baseline Nuclear Reactor Core
[0065]	730 Basic S-Block and U-Mod
[0066]	740 Advanced S-Block and U-Mod
[0067]	800 U-Mod Physical Property Table
[0068]	802A-B Candidate High-Temperature Thermal Insulators
[0069]	803A-F Candidate Low-Temperature Solid-Phase Moderators
[0070]	810 Graphite
[0071]	900 Thermal Analysis Graph
[0072]	903 Moderator Element Maximum Temperature
[0073]	904 Nuclear Fuel Tile Maximum Temperature
[0074]	905 Axial Distance
[0075]	910 Temperature
[0076]	970A Moderator Coolant Maximum Temperature
[0077]	970B Nuclear Fuel Coolant Maximum Temperature
[0078]	1000 Depletion Graph of Nuclear Reactor Core
[0079]	1005 Lifetime
[0080]	1010 K-Effective
[0081]	1100A-F Nuclear Reactor Systems
[0082]	1101 Nuclear Reactor Core Performance and Properties Comparison Table
[0083]	1105A-F Nuclear Reactor Mass
[0084]	1106A-F Power Level
[0085]	1107A-F Power per Mass
[0086]	1108A-F Outlet Temperature
[0087]	1109A-F Uranium-235 Enrichment

DETAILED DESCRIPTION

[0088] In the following detailed description, numerous specific details are set forth by way of examples in order to provide a thorough understanding of the relevant teachings. However, it should be apparent to those skilled in the art that the present teachings may be practiced without such details. In other instances, well known methods, procedures, components, and/or circuitry have been described at a relatively high-level, without detail, in order to avoid unnecessarily obscuring aspects of the present teachings.

[0089] The term “coupled” as used herein refers to any logical or physical connection. Unless described otherwise, coupled elements or devices are not necessarily directly connected to one another and may be separated by intermediate components, elements, etc.

[0090] Unless otherwise stated, any and all measurements, values, ratings, positions, magnitudes, sizes, angles, and other specifications that are set forth in this specification, including in the claims that follow, are approximate, not exact. Such amounts are intended to have a reasonable range that is consistent with the functions to which they relate and with what is customary in the art to which they pertain. For example, unless expressly stated otherwise, a parameter value or the like may vary by as much as $\pm 5\%$ or as much as $\pm 10\%$ from the stated amount. The term “approximately” or “substantially” means that the parameter value or the like varies up to $\pm 10\%$ from the stated amount.

[0091] The orientations of the nuclear reactor core 101, nuclear reactor 107, associated components, and/or any nuclear reactor system 100 incorporating the nuclear reactor core 101, such as shown in any of the drawings, are given by way of example only, for illustration and discussion purposes. In operation for a particular nuclear reactor system 100, the nuclear reactor 107 may be oriented in any other direction suitable to the particular application of the nuclear reactor 107, for example upright, sideways, or any other orientation. Also, to the extent used herein, any directional term, such as lateral, longitudinal, up, down, upper, lower, top, bottom, and side, are used by way of example only, and are not limiting as to direction or orientation of any nuclear reactor 107 or component of the nuclear reactor 107 constructed as otherwise described herein. Reference now is made in detail to the examples illustrated in the accompanying drawings and discussed below.

[0092] FIG. 1 is a cross-sectional view of a nuclear reactor core 101 of a nuclear reactor system 100. The nuclear reactor system 100 includes an architecture for the nuclear reactor core 101 that includes several enhancing technologies: (1) nuclear fuel tiles 104A-N (referred to as “S-Block”); and (2) a high-temperature thermal insulator with a low-temperature solid-phase moderator (referred to as “U-Mod”).

[0093] In S-Block technology, nuclear fuel tiles 104A-N include a fuel shape designed to optimize heat transfer into a nuclear fuel coolant 170B by bringing the nuclear fuel coolant 170B in direct contact with the nuclear fuel tiles 104A-N. Nuclear fuel tiles 104A-N can be shaped as unit-lattice element that is relatively simple to manufacture due to the shape and size of the tile geometry. In U-Mod technology, a high-temperature moderator is surrounded by a tube liner 106A-N applied as a hydrogen barrier cladding or coating around moderator elements 103A-N. Tube liners 106A-N can be formed of solid phase hydrides and are able to retain hydrogen even at elevated temperatures of nuclear fuel tiles 104A-N. Insulator elements 102A-N are formed of a high-temperature thermal insulator material. A combination of moderator coolant passages 121A-N and the insulator elements 102A-N enable the moderator elements 103A-N to be at a temperature significantly lower than the nuclear fuel tiles 104A-N.

[0094] Nuclear reactor system 100 can be a high-temperature, gas-cooled, thermal spectrum reactor that implements a high-temperature nuclear fuel in a custom geometric shape of nuclear fuel tiles 104A-N(S-Blocks) to maximize heat transfer into the nuclear fuel coolant 170B. Nuclear reactor system 100 also implements a high-temperature and high-performance neutron moderator formed by a combination of the insulator elements 102A-N, moderator elements 103A-N, tube liners 106A-N, and moderator coolant passages 121A-N (U-Mod).

[0095] Nuclear reactor system **100** includes a nuclear reactor **107**. The nuclear reactor **107** includes the nuclear reactor core **101**, in which a controlled nuclear chain reaction occurs, and energy is released. The neutron chain reaction in the nuclear reactor core **101** is critical—a single neutron from each fission nucleus results in fission of another nucleus—the chain reaction must be controlled.

[0096] By sustaining controlled nuclear fission, the nuclear reactor system **100** produces heat energy. In an example implementation, the nuclear reactor system **100** is implemented as a gas-cooled nuclear reactor **107** where moderator coolant **170A** and nuclear fuel coolant **170B** are a gas to achieve performance gains. In the gas-cooled nuclear reactor **107**, the high power density, rated power output, and safety case of the nuclear reactor core **101** enabled by S-Block and U-Mod drastically reduces the costs of nuclear energy and enables modular, offsite construction. However, the S-Block and U-Mod technologies can also enable breakthrough performance in other thermal spectrum nuclear reactor systems **100**, including large utility scale reactors, heat pipe reactors, and molten-salt-cooled reactors.

[0097] In the depicted example, the nuclear reactor system **100** with the nuclear reactor core **101** is utilized in a space environment, such as in a nuclear thermal propulsion (NTP) system. An example NTP system that the S-Block and U-Mod architecture of the nuclear reactor core **101** can be implemented in is described in FIGS. 1-2 and the associated text of U.S. Pat. No. 10,643,754 to Ultra Safe Nuclear Corporation of Seattle, Wash., issued May 5, 2020, titled “Passive Reactivity Control of Nuclear Thermal Propulsion Reactors” the entirety of which is incorporated by reference herein. In another example, the nuclear reactor system **100** with the nuclear reactor core **101** is utilized in a space reactor for electrical power production on a planetary surface.

[0098] Conventional space reactor designs typically utilize highly-enriched uranium (HEU) fuel (weapons grade) to have both low-mass and high-temperature output. The architecture for the nuclear reactor core **101** described herein is directly applicable to enabling the development of low-mass, high-temperature, low-enriched uranium (LEU) fueled (non-weapons grade) nuclear reactors to increase efficiency and can be designed specifically for space applications. For example, the nuclear reactor system **100** that includes the nuclear reactor core **101** can be a nuclear thermal rocket reactor, nuclear electric propulsion reactor, Martian surface reactor, or lunar surface reactor.

[0099] In such an NTP system (e.g., compact space nuclear reactor), a generated thrust propels a vehicle that houses, is formed integrally with, connects, or attaches to the nuclear reactor core **101**, such as a rocket, drone, unmanned air vehicle (UAV), aircraft, spacecraft, missile, etc. Typically, this is done by heating a propellant, typically low molecular weight hydrogen, to over 2,600° Kelvin by harnessing thermal energy from the nuclear reactor core **101**. In addition, the NTP nuclear reactor system **100** can be used in the propulsion of submarines or ships.

[0100] As noted above, the nuclear reactor system **100** can also be a nuclear power plant in a terrestrial land application, e.g., for providing nuclear power (e.g., thermal and/or electrical power) for remote region applications, including outer space, celestial bodies, planetary bodies, and remote regions on Earth. An example terrestrial land nuclear reactor system that the S-Block and U-Mod architecture of the

nuclear reactor core **101** can be implemented in is described in FIG. 1 and the associated text of U.S. Patent Pub. No. 2020/0027587 to Ultra Safe Nuclear Corporation of Seattle, Wash., published Jan. 23, 2020, titled “Composite Moderator for Nuclear Reactor Systems,” the entirety of which is incorporated by reference herein.

[0101] Nuclear reactor system **100** can also be a terrestrial power system, such as a nuclear electric propulsion (NEP) system for fission surface power (FSP) system. NEP powers electric thrusters such as a Hall-effect thruster for robotic and human spacecraft. FSP provides power for planetary bodies such as the moon and Mars. In the NEP and FSP power applications, the nuclear reactor system **100** enabled with S-Block and U-Mod technologies heats a working fluid (e.g., He, HeXe, Ne, CO₂) through a power conversion system (e.g., Brayton) to produce electricity. Moreover, in the NEP and FSP power applications, the nuclear reactor system **100** does not include a propellant, but rather includes a working fluid that passes through a reactor inlet when producing power. In the NEP and FSP power applications, the moderator elements **103A-N** can be cooled via the reactor inlet working fluid (e.g., the flow coming out of a recuperator) before the working fluid passes through the nuclear fuel tiles **104A-N**.

[0102] Utilizing the two S-Block and U-Mod nuclear reactor technologies described herein enables a nuclear reactor system **100** that is high-temperature, compact, accident tolerant, and operates safely and reliably throughout the lifetime of the nuclear reactor system **100**. For example, the nuclear reactor system **100** can be a small commercial fission power system for near term space operations, lunar landers, or a commercial fission power system for high-power spacecraft and large-scale surface operations, such as in-situ resource utilization.

[0103] As shown, nuclear reactor core **101** includes an insulator element array **112** and a moderator element array **113**, which implements U-Mod technology. U-Mod technology enables building of a compact nuclear reactor system **100** with a large enough power density, rated power output, and lifetime that is commercially viable. As shown, insulator element array **112** includes thirty-seven insulator elements **102A-N** and moderator element array **113** includes thirty-seven moderator elements **103A-N**. A respective moderator element **103A-N** is formed of a low-temperature solid-phase moderator disposed inside (e.g., located within) a respective insulator element **102A-N**. Although A is the first letter of the alphabet and N is the fourteenth letter of the alphabet, due to the restriction of the alphabet, the designation “A-N” when following a reference number, such as **102**, **103**, **104**, **121**, **141**, etc. can refer to more than twenty-six of those identical elements.

[0104] U-Mod technology is an improvement over current methods for cooling solid-phase moderators in the nuclear reactor core **101** utilizing a closed-loop power cycle. U-Mod provides a cooling path and/or heat removal mechanism for the moderator elements **103A-N** that is distinctly separated and thermally insulated from the nuclear fuel tiles **104A-N** and the cooling and/or heat removal path for the nuclear fuel tiles **104A-N**. Thermal insulation of the moderator elements **103A-N** is achieved by two separate insulating mechanisms: (1) a high-temperature thermal insulator (e.g., insulator elements **102A-N**); and (2) a separate moderator cooling loop for the moderator coolant **170A** (e.g., gaseous or liquid) that includes moderator coolant passages **121A-N**. The

high-temperature thermal insulator forming the insulator elements **102A-N** is a solid thermal insulator that is the interface between the nuclear fuel tiles **104A-N** and the moderator element array **113** assembly of moderator elements **103A-N**. The high-temperature thermal insulator is made of a low thermal conductivity material capable of operating at elevated temperatures of the nuclear fuel tiles **104A-N**.

[0105] U-Mod technology enables maintaining the moderator elements **103A-N** at a distinctly separate and lower operating temperature from the nuclear fuel tiles **104A-N**. U-Mod technology thus allows the low-temperature solid-phase neutron moderator material forming the moderator elements **103A-N** to be maintained at a lower temperature within high-temperature thermal nuclear reactor system **100** utilizing a closed-loop power cycle. In U-Mod, each of the insulator elements **102A-N** is formed of the high-temperature thermal insulator material with low thermal conductivity. Insulator elements **102A-N** are formed in conjunction with the moderator coolant passages **121A-N** and tube liners **106A-N** that enable low hydrogen diffusivity.

[0106] The high-temperature thermal insulator material can include low density carbides, metal-carbides, metal-oxides, or a combination thereof. More specifically, the high-temperature thermal insulator material includes low density SiC, stabilized zirconium oxide, aluminum oxide, low density ZrC, low density carbon, or a combination thereof. Tube liners **106A-N** are formed of a hydrogen barrier material with low hydrogen diffusivity. The hydrogen barrier material includes Al_2O_3 , SiC, ZrC, MgO, Mo, W, Cu, Ni, Cr, or a combination thereof for retention of hydrogen in the moderator elements **103A-N**. Moderator elements **103A-N** are formed of a low-temperature solid-phase moderator. The low-temperature solid-phase moderator includes MgH_x , YH_x , ZrH_x , CaH_x , ZrO_x , CaO_x , BeO_x , BeC_x , Be, enriched boron carbide, $^{11}B_4C$, CeH_x , LiH_x , or a combination thereof. In one implementation, the moderator elements **103A-N** are formed of the low-temperature solid-phase moderator that includes ZrH with the tube liners **106A-N** (see FIG. 3) coated thereon. Moderator elements **103A-N** are coupled to a two-pass in-core coolant pathway to enable compact size of the nuclear reactor core **101** and LEU nuclear fuel to be implemented in the nuclear fuel tiles **104A-N**. A respective moderator element **103A-N** is disposed inside a respective tube liner **106A-N** for hydrogen retention.

[0107] To further enhance the temperature of the low-temperature solid-phase moderator forming the moderator elements **103A-N** and prevent the loss of nuclear fuel coolant **170B** (e.g., propellant, such as hydrogen) during operation and accident conditions, the tube liners **106A-N** are implemented as the hydrogen barrier material. The hydrogen barrier material of the tube liners **106A-N** keeps the hydrogen in the low-temperature solid-phase moderator material. The hydrogen in the low-temperature solid-phase moderator material is what slows down neutrons in the nuclear reactor core **101**. The hydrogen barrier material is needed because hydrogen is always trying to escape from the low-temperature solid-phase moderator material and hydrogen diffuses through the low-temperature solid-phase moderator material.

[0108] In a first implementation, the tube liners **106A-N** are a hydrogen barrier material coatings applied to, e.g., coated around or on, the surfaces of the low-temperature

solid-phase moderator material with the low-temperature solid-phase moderator material forming the moderator elements **103A-N** disposed inside the hydrogen barrier material coating. In a second implementation, the tube liners **106A-N** can be implemented as a hydrogen barrier material cladding, such as a hermetically sealed container, with the low-temperature solid-phase moderator material forming the moderator elements **103A-N** disposed inside the hydrogen barrier material cladding.

[0109] Nuclear reactor core **101** further includes a nuclear fuel tile array **114**, which implements S-Block technology to enhance modular construction of the nuclear reactor core **101** and reduce the need for site specific environmental design of the nuclear reactor system **100**. Moreover, the safety properties of the S-Block fuel reduce risk and can reduce human personnel requirements to monitor the nuclear reactor system **100**. S-Block technology is achieved by the nuclear fuel tile array **114** that includes a plurality of nuclear fuel tiles **104A-N**. Nuclear fuel tiles **104A-N** are formed into a fuel shape to increase heat transfer into the nuclear fuel tiles **104A-N** and effectively reduce safety margins, provide higher power nuclear reactor systems, and consequently improve the economics of the nuclear reactor core **101**.

[0110] Nuclear fuel tiles **104A-N** create a heat conduction pathway between the nuclear fuel tiles **104A-N**, and have a modular geometry to improve manufacturing costs. As shown in the example of FIG. 3, the nuclear fuel tiles **104A-N** can be formed of a base nuclear fuel that includes tri-structural isotropic fuel (TRISO) fuel particles **151A-N**. TRISO fuel particles **151A-N** include a fuel kernel coated by the following layers: (1) low density graphite; (2) pyrolytic graphite (PyG); (3) silicon carbide (SiC); (4) PyG; and (5) SiC. The TRISO fuel particles **151A-N** are suspended in a high-temperature matrix **152** to form the base nuclear fuel. The high-temperature matrix **152** (see FIG. 3) can include SiC, a refractory metal carbide, tungsten, molybdenum, or a combination thereof. The refractory metal carbide forming the high-temperature matrix can include zirconium carbide (ZrC), titanium carbide (TiC), niobium carbide (NbC), etc.

[0111] Nuclear fuel tiles **104A-N** enable a high-performance nuclear fuel that exceeds existing nuclear fuel limits—use of refractory carbide compacts to enable operation of the nuclear reactor core **101** in excess of 3,000 degrees Kelvin (K). High performance refractory carbides are chemically compatible with the hot hydrogen environment and relevant fuel particle coatings (PyC) in space applications (e.g., NTP), such as the NERVA/Rover program and provide some of the lowest vaporization rates at high temperature to enhance overall engine lifetime and enable the potential for nuclear reactor core reusability. Modern manufacturing techniques, such as reactive Spark Plasma Sintering (SPS) and advanced oxide additives, can allow for the refractory carbides to be utilized to form the nuclear fuel tiles **104A-N**. Many refractory carbides have a low neutron absorption cross section and a high moderating power. This allows for criticality to be achieved with LEU as the fuel kernel.

[0112] Nuclear fuel tiles **104A-N** are implemented with a base shape (e.g., illustrated in FIGS. 4A-B, 5, 6) or a truncated portion thereof, which advantageously enables the direct contact between nuclear fuel tiles **104A-N** to increase the heat transfer between the nuclear fuel tiles **104A-N**. The base shape of the nuclear fuel tiles **104A-N** also increases the heat transfer into the nuclear fuel coolant **170B**. Nuclear

fuel tiles **104A-N** provide a reproducible unit cell that is easily tiled to fit multiple nuclear reactor core **101** geometry requirements, including complex core geometries, and enable high density neutron moderators to be utilized as the moderator elements **103A-N** in the active nuclear reactor core **101**. In contrast to conventional cylindrical shaped nuclear fuel pellets, the nuclear fuel tiles **104A-N** reduce the temperature difference between the nuclear fuel tiles **104A-N** and the nuclear fuel coolant **170B**, provide a conduction pathway from the nuclear fuel tiles **104A-N** to the structure of the nuclear reactor system **100** outside the nuclear reactor core **101** in case of a loss of coolant accident, and improve heat transfer into the nuclear fuel coolant **170B**.

[0113] The fuel shape of nuclear fuel tiles **104A-N** can be manufactured using spark plasma sintering (SPS) or other sintering techniques as it has a L/D less than one (plate like). This allows the relatively simple manufacture of the elements to reduce the vertical press distance for the final stage of densification. Additive manufacturing can be used instead.

[0114] In an NTP, NEP, or FSP nuclear reactor system **100**, the nuclear reactor **107** can include a plurality of control drums **115A-N** and a reflector **140**. The control drums **115A-N** may laterally surround the insulator element array **112** of insulator elements **102A-N**, the moderator element array **113** of moderator elements **103A-N**, and nuclear fuel tile array **114** of nuclear fuel tiles **104A-N** to change reactivity of the nuclear reactor core **101** by rotating the control drums **115A-N**. As depicted, the control drums **115A-N** reside on the perimeter or periphery of a pressure vessel **160** and are positioned circumferentially around the insulator elements **102A-N**, tube liners **106A-N**, moderator elements **103A-N**, and nuclear fuel tiles **104A-N** of the nuclear reactor core **101**. Control drums **115A-N** may be located in an area of the reflector **140**, e.g., an outer reflector region immediately surrounding the nuclear reactor core **101**, to selectively regulate the neutron population and nuclear reactor power level during operation. For example, the control drums **115A-N** can be a cylindrical shape and formed of both a reflector material **116** (e.g., beryllium (Be), beryllium oxide (BeO), BeSiC, BeMgO, Al_2O_3 , etc.) on a first outer surface and an absorber material **117** on a second outer surface.

[0115] The reflector material **116** and the absorber material **117** can be on opposing sides of the cylindrical shape, e.g., portions of an outer circumference, of the control drums **115A-N**. The reflector material **116** can include a reflector substrate shaped as a cylinder or a truncated portion thereof. The absorber material **117** can include an absorber plate or an absorber coating. The absorber plate or the absorber coating are disposed on the reflector substrate to form the cylindrical shape of each of the control drums **115A-N**. For example, the absorber plate or the absorber coating covers the reflector substrate formed of the reflector material to form the control drums **115A-N**.

[0116] Rotating the depicted cylindrical-shaped control drums **115A-N** changes proximity of the absorber material **117** (e.g., boron carbide, B_4C) of the control drums **115A-N** to the nuclear reactor core **101** to alter the amount of neutron reflection. When the reflector material **116** is inwards facing towards the nuclear reactor core **101** and the absorber material **117** is outwards facing, neutrons are scattered back (reflected) into the nuclear reactor core **101** to cause more fissions and increase reactivity of the nuclear reactor core

101. When the absorber material **117** is inwards facing towards the nuclear reactor core **101** and the reflector material **116** is outwards facing, neutrons are absorbed and further fissions are stopped to decrease reactivity of the nuclear reactor core **101**. In a terrestrial land application, the nuclear reactor core **101** may include control rods (not shown) composed of chemical elements such as boron, silver, indium, and cadmium that are capable of absorbing many neutrons without themselves fissioning.

[0117] Neutron reflector **140**, e.g., shown as the outer reflector region, can be filler elements disposed between outermost nuclear fuel tiles **104A-N** and the control drums **115A-N** as well as around the control drums **115A-N**. Reflector **140** can be formed of a moderator that is disposed between the outermost nuclear fuel tiles **104A-N** and an optional barrel (e.g., formed of beryllium). The reflector **140** can include hexagonal or partially hexagonal shaped filler elements and can be formed of a neutron moderator (e.g., beryllium oxide, BeO). Although not required, nuclear reactor **107** can include the optional barrel (not shown) to surround the bundled collection that includes the insulator element array **112**, tube liners **106A-N**, moderator element array **113**, nuclear fuel tile array **114** of the nuclear reactor core **101**, as well as the reflector **140**. As depicted, the control drums **115A-N** reside on the perimeter of the pressure vessel **160** and can be interspersed or disposed within the reflector **140**, e.g., surround a subset of the filler elements (e.g., reflector blocks **141A-N**) forming the reflector **140**.

[0118] Pressure vessel **160** can be formed of aluminum alloy, carbon-composite, titanium alloy, a radiation resilient SiC composite, nickel based alloys (e.g., Inconel™ or Haynes™), or a combination thereof. Pressure vessel **160** and nuclear reactor system **100** can be comprised of other components, including cylinders, piping, and storage tanks that transfer a moderator coolant **170A** that flows through moderator coolant passages **121A-N**; and a separate nuclear fuel coolant **170B**, such as a propellant (e.g., hydrogen gas or liquid) that flows through the fuel coolant passages **141A-N**. The moderator coolant **170A** and the nuclear fuel coolant **170B** can be a gas or a liquid, e.g., that transitions from a liquid to a gas state during a burn cycle of the nuclear reactor core **101** for thrust generation in an NTP nuclear reactor system **100**. Hydrogen is for an NTP nuclear reactor system **100**. In NEP or FSP applications, the nuclear reactor system **100** circulates a working fluid, such as He, neon, HeXe, CO_2 , instead.

[0119] Nuclear reactor system **100** advantageously enables the moderator coolant **170A** to flow through the moderator coolant passages **121A-N** and a separate nuclear fuel coolant **170B** (e.g., a propellant, such as hydrogen gas) to flow through the fuel coolant passages **141A-N**. The moderator coolant passages **121A-N** are flattened ring shaped (e.g., O-shape) openings, such as a channels or holes to allow the moderator coolant **170A** to pass through in the nuclear reactor core **101** and into a heat sink (not shown) via a dedicated moderator coolant loop, for example. The fuel coolant passages **141A-N** are channels or holes to allow the nuclear fuel coolant **170B** to pass through in the nuclear reactor core **101** and into a thrust chamber (not shown) for propulsion in a separate nuclear fuel coolant loop, for example.

[0120] In an alternative implementation, a coolant **170** that is shared between the moderator elements **103A-N** and the nuclear fuel tiles **104A-N** may be flowed through both the

moderator coolant passages 121A-N and the fuel coolant passages 141A-N, but the alternative implementation may not achieve the enhanced performance gains described herein. In the alternative implementation, the coolant 170 that flows through the nuclear fuel tiles 104A-N can include helium, FLiBe molten salt formed of lithium fluoride (LiF), beryllium fluoride (BeF₂), sodium, He, HeXe, CO₂, neon, or HeN. In the alternative implementation, the shared coolant 170 flows through the moderator coolant passages 121A-N before the shared coolant 170 is heated in the nuclear fuel tiles 104A-N. This keeps the moderator elements 103A-N cool.

[0121] FIG. 2 is an isometric view of a portion of the nuclear reactor core 101 of FIG. 1 showing details of moderator coolant passages 121A-N and fuel coolant passages 141A-N. As depicted, the respective insulator element 102A-N is shaped as a tube or a pipe. The respective insulator element 102A-N with the respective moderator element 103A-N disposed inside includes a respective moderator coolant passage 121A-N formed therein. The respective moderator coolant passage 121A-N is located between the respective moderator element 103A-N and the respective insulator element 102A-N.

[0122] In some examples (e.g., see FIGS. 4A-B and 5), the insulator elements 102A-N are depicted as a cylindrical shaped tube or pipe, the moderator elements 103A-N are depicted as cylinders, the moderator coolant passages 121A-N are depicted as ring shaped, and the fuel coolant passages 141A-N are depicted as cylinders. However, the insulator elements 102A-N, the moderator elements 103A-N, the moderator coolant passages 121A-N, and fuel coolant passages 141A-N can be formed into a variety of shapes. In addition to being a circular or other round shape in two-dimensional space, the insulator elements 102A-N, the moderator coolant passages 121A-N, and fuel coolant passages 141A-N can be oval, square, rectangular, triangular, or another polygon shape. For example, the insulator elements 102A-N can be a polyhedron (e.g., a triangular prism as shown in FIG. 6 or a cuboid) in three-dimensional space. In order to be disposed inside the insulator elements 102A-N, the moderator elements 103A-N can be a shape that conforms to the shape of the insulator elements 102A-N and the moderator coolant passages 121A-N.

[0123] The architecture of the nuclear reactor core 101 improves cooling of a solid-phase moderator, shown as moderator elements 103A-N, in nuclear power reactors. A closed-loop coolant cycle achieves a separate and insulated mechanism for cooling the moderator elements 103A-N via moderator coolant passages 121A-N that does not interfere with the cooling system of the nuclear fuel, shown as nuclear fuel tiles 104A-N.

[0124] By insulating and separately cooling the moderator elements 103A-N formed of the low-temperature solid-phase moderator separately, the low-temperature solid-phase moderator can be kept at a lower temperature compared to the nuclear fuel (e.g., nuclear fuel tiles 104A-N). This enables the implementation of the low-temperature solid-phase moderator (such as hydride-based and beryllium-based), which is attractive due to the higher neutron moderating ability of the low-temperature solid-phase moderator relative to a high-temperature solid-phase moderator (e.g., carbon-based graphite).

[0125] If allowed to reach higher temperatures, the low-temperature solid-phase moderator forming the moderator

elements 103A-N may begin to dissociate or decompose, resulting in a net loss of reactivity, slowing the fission or chain reaction. By encasing or coating the moderator elements 103A-N within tube liners 106A-N (see FIG. 3), insulating the moderator elements 103A-N from the nuclear fuel tiles 104A-N with insulator elements 102A-N, and then creating the moderator coolant passages 121A-N in a separate moderator cooling loop from the fuel coolant passages 141A-N of the nuclear fuel tiles 104A-N, a high-temperature nuclear reactor 107 optimized for small size is achieved.

[0126] Use of the low-temperature solid-phase moderator for the moderator elements 103A-N is important for high-temperature nuclear reactors optimized for small size that use low-enriched uranium (LEU) as nuclear fuel. Because the low-temperature solid-phase moderator that forms the moderator elements 103A-N has a higher moderating power and slowing down ratio (macroscopic slowing down power), the low-temperature solid-phase moderator enables a compact nuclear reactor system 100 with smaller amounts of fissile material (e.g., reduces the amount of uranium needed in the nuclear reactor core 101). The depicted nuclear reactor core 101 thus provides a wider range of operating temperatures, loop configurations, and applications.

[0127] Accordingly, in the depicted example of FIG. 2, the respective moderator coolant passage 121A-N flows a moderator coolant 170A through to both: (i) heat the moderator coolant 170A, and (ii) cool the respective moderator element 103A-N. The respective nuclear fuel tile 104A-N includes one or more nuclear fuel coolant passages 141A-N formed therein that flow a nuclear fuel coolant 170B that is separate from and different from the moderator coolant 170A in order to heat the nuclear fuel coolant 170B via direct contact with the respective nuclear fuel tile 104A-N. Nuclear fuel coolant 170B can be a propellant (e.g., hydrogen) for nuclear thermal propulsion (NTP). In other words, the moderator coolant 170A that flows through the respective moderator coolant passage 121A-N is in a moderator coolant loop dedicated to the moderator element array 113 of moderator elements 103A-N and that is thermally isolated and separated from a nuclear fuel coolant loop that includes the fuel coolant passages 141A-N to flow the nuclear fuel coolant 170B. In an NEP or FSP nuclear reactor 107, a working fluid, such as He, neon, HeXe, CO₂, etc. is circulated instead.

[0128] Moderator coolant loop thermally isolates the moderator coolant 170A from the nuclear fuel coolant 170B to actively remove heat from the moderator elements 103A-N to maintain the moderator elements 103A-N at a lower temperature compared to the nuclear fuel tile array 114 of fuel tiles 104A-N during operation of the nuclear reactor core 101. Moderator coolant loop includes a heat sink, which can be mounted on an exterior of the pressure vessel 160 or on other components of the nuclear reactor system 100 and the moderator coolant 170A is thermally coupled to the heat sink.

[0129] Although not shown, the nuclear reactor system 100 can further include a moderator coolant turbopump assembly comprising at least one turbine and a pump that moves the moderator coolant 170A to flow through the heat sink to cool the plurality of moderator elements 103A-N during operation of the nuclear reactor core 101. The pump and turbine in the moderator coolant turbopump assembly flow the moderator coolant 170A through the moderator coolant piping, moderator coolant passages 121A-N, and

then the heat sink, where the moderator coolant **170A** becomes cooled after passing through the heat sink. Nuclear reactor system **100** can also include a compressor and a blower that moves the moderator coolant **170A**. If the moderator coolant **170A** is in a gas state as opposed to a liquid state, then the compressor and the blower move the moderator coolant **170A** through the moderator coolant piping, moderator coolant passages **121A-N**, and then the heat sink. When the moderator coolant **170A** is in a liquid state, the pump flows the moderator coolant **170A**. In an NTP nuclear reactor system **100**, the moderator elements **103A-N** and nuclear fuel tiles **104A-N** can draw from the same turbopump assembly.

[0130] Nuclear reactor system **100** further includes a nuclear fuel coolant turbopump assembly that flows the nuclear fuel coolant **170B** to flow through the nuclear fuel tiles **104A-N** to generate power during operation of the nuclear reactor core **101**. The pump and turbine in the nuclear fuel coolant turbopump assembly move the nuclear fuel coolant **170B** (e.g., propellant) through nuclear fuel coolant piping and then the fuel coolant passages **141A-N**. By passing through the fuel coolant passages **141A-N**, the nuclear fuel coolant **170B** becomes superheated in the nuclear fuel tiles **104A-N** of the nuclear reactor core **101** and expands to a gas, e.g., for thrust or power generation. In NEP or FSP applications, the nuclear reactor system **100** includes a turbojet (e.g., a turbine and a compressor), instead of a turbopump assembly for the coolant **170A-B**.

[0131] As noted above, the separated moderator coolant loop and nuclear fuel coolant loop serve to further isolate the moderator elements **103A-N** from the nuclear fuel tiles **104A-N**, as well as actively removes heat from the moderator elements **103A-N** due to internal heating. In addition to enabling low-temperature solid-phase moderator materials to be maintained at a lower temperature, the heated moderator coolant **170A** itself, can also be used for the following advantageous purposes. First, moderator coolant **170A** can be chemically incompatible with the plurality of nuclear fuel tiles **104A-N** to drive a secondary power cycle and/or supply additional neutron moderation in the nuclear reactor system **100**. In NEP or FSP applications, the point of the nuclear reactor system **100** is to generate power. Second, moderator coolant **170A** allows for preheating of the nuclear fuel coolant **170B**, either indirectly or directly, enabling a higher reactor outlet temperature. Third, moderator coolant **170A** allows for cooling of other parts of the nuclear reactor system **100** without affecting the dynamic fluid system performance of the nuclear fuel tiles **104A-N** cooling path and/or heat removal mechanism. Fourth, moderator coolant **170A** allows for a hydrogen overpressure to be maintained when the moderator elements **103A-N** are formed of a hydrogenous low-temperature solid-phase moderator. Fifth, moderator coolant **170A** allows for the application of an inherent safety mechanism, where decomposition of the neutron moderator occurs due to higher temperatures reached in an accident scenario. Decomposition of the neutron moderator would inhibit any re-criticality from occurring.

[0132] In an application where achieving a high-temperature and compact nuclear reactor system **100** is not important, the moderator coolant passages **121A-N** can be in the same cooling loop with the fuel coolant passages **121A-N**. Accordingly, in such an application the respective moderator

coolant passage **121A-N** flows a coolant **170** through to both: (i) heat the coolant **170**, and (ii) cool the respective moderator element **103A-N**.

[0133] FIG. 3 is a zoomed-in view of the cross-section of the nuclear reactor core **101** of FIG. 1 depicting details of insulator elements **102A-D**, tube liners **106A-D**, moderator elements **103A-C**, and nuclear fuel tiles **104A-B**. Two nuclear fuel files **104A-B** are shown in the cross-section of FIG. 3. Each of the nuclear fuel tiles **104A-N** is formed of a fuel compact **150** comprised of: coated fuel particles, such as tristructural-isotropic (TRISO) fuel particles **151A-N** embedded inside a high-temperature matrix **152**. In some implementations, the fuel compact **150** is comprised of bistructural-isotropic (BISO) fuel particles embedded inside the high-temperature matrix **152**. The high-temperature matrix **152** includes silicon carbide, zirconium carbide, titanium carbide, niobium carbide, tungsten, molybdenum, or a combination thereof. Each of the TRISO fuel particles **151A-N** can include a fuel kernel surrounded by a porous carbon buffer layer, an inner pyrolytic carbon layer, a ceramic layer, and an outer pyrolytic carbon layer.

[0134] A description of TRISO fuel particles dispersed in a silicon carbide matrix to form a cylindrical shaped nuclear fuel compact is provided in the following patents and publications of Ultra Safe Nuclear Corporation of Seattle, Wash.: U.S. Pat. No. 9,299,464, issued Mar. 29, 2016, titled "Fully Ceramic Nuclear fuel and Related Methods"; U.S. Pat. No. 10,032,528, issued Jul. 24, 2018, titled "Fully Ceramic Micro-encapsulated (FCM) fuel for CANDUs and Other Reactors"; U.S. Pat. No. 10,109,378, issued Oct. 23, 2018, titled "Method for Fabrication of Fully Ceramic Microencapsulation Nuclear Fuel"; U.S. Pat. No. 9,620,248, issued Apr. 11, 2017 and U.S. Pat. No. 10,475,543, issued Nov. 12, 2019, titled "Dispersion Ceramic Micro-encapsulated (DCM) Nuclear Fuel and Related Methods"; U.S. Patent Pub. No. 2020/0027587, published Jan. 23, 2020, titled "Composite Moderator for Nuclear Reactor Systems"; and U.S. Pat. No. 10,573,416, issued Feb. 25, 2020, titled "Nuclear Fuel Particle Having a Pressure Vessel Comprising Layers of Pyrolytic Graphite and Silicon Carbide," the entireties of which are incorporated by reference herein. As described in those Ultra Safe Nuclear Corporation patents, the nuclear fuel generally includes a cylindrical fuel compact or pellet comprised of TRISO fuel particles embedded inside a silicon carbide matrix to create the cylindrical shaped nuclear fuel compact.

[0135] Of the possible high-temperature matrix **152** materials to embed the coated fuel particles, including TRISO fuel particles **151A-N** or BISO fuel particles, which form the nuclear fuel tiles **104A-N**, silicon carbide (SiC) offers good irradiation behavior, and fabrication. SiC has excellent oxidation resistance due to rapid formation of a dense, adherent silicon dioxide (SiO₂) surface scale on exposure to air at elevated temperature, which prevents further oxidation. TRISO fuel particles **151A-N** can include a fuel kernel (e.g., UC or uranium oxycarbide (UCO) in the center), coated with one or more layers surrounding one or more isotropic materials. TRISO fuel particles **151A-N** include four layers of three isotropic materials. For example, the four layers can include: (1) a porous buffer layer made of carbon; followed by (2) a dense inner layer of pyrolytic carbon (PyC); followed by (3) a binary carbide layer (e.g., ceramic layer of SiC or a refractory metal carbide layer) to retain fission products at elevated temperatures and to give the TRISO

fuel particles **151A-N** a strong structural integrity; followed by (4) a dense outer layer of PyC. The refractory metal carbide layer of the TRISO fuel particles **151A-N** can include at least one of titanium carbide (TiC), zirconium carbide (ZrC), niobium carbide (NbC), tantalum carbide, hafnium carbide, ZrC—ZrB₂ composite, ZrC—ZrB₂—SiC composite, or a combination thereof. The high-temperature matrix **152** can be formed of the same material as the binary carbide layer of the TRISO fuel particles **151A-N**.

[**0136**] TRISO fuel particles **151A-N** are designed not to crack due to the stresses or fission gas pressure at temperatures beyond 1,600° C., and therefore can contain the fuel kernel in the worst of accident scenarios. TRISO fuel particles **151A-N** are designed for use in high-temperature gas-cooled reactors (HTGR) that include the nuclear reactor core **101** and to be operating at temperatures much higher than the temperatures of LWRs. Nuclear fuel tiles **104A-N** have exceptional fission product retention. TRISO fuel particles **151A-N** have extremely low failure below 1500° C. Moreover, the presence of the high-temperature matrix **152** provides an additional robust barrier to fission product release.

[**0137**] A respective nuclear fuel tile **104A-N** includes a plurality of nuclear fuel lateral facets **181A-N** (see FIGS. **4A-B**, **5**, and **6**) that border a respective insulator element **102A-N** or another respective nuclear fuel tile **104A-N**. Nuclear fuel lateral facets **181A-N** appear to an observer as a curved surface or a flat surface like a cut gemstone with many facets. A “facet” can be a flattened segment (e.g., planar surface) or curved segment (e.g., aspherical or spherical surface). The multiple nuclear fuel lateral facets **181A-N** form a discontinuous (e.g., non-uniform or jagged) outer periphery **186** of the nuclear fuel tile **104A**. As used herein “interface wall” includes a section of the outer periphery **186** that the outer periphery **186** is divided into. The interface wall can be formed of one facet (single faceted) like the insulator element interface wall **183A** of FIG. **4B** or multiple facets (multi-faceted) like the tile interface wall **182A** of FIG. **4B**.

[**0138**] Nuclear reactor core **101** includes tube liners **106A-N** within an insulated boundary for the moderator coolant **170A** to interface between the insulator elements **102A-N** and the moderator elements **103A-N** in a flow path of the moderator cooling loop. A respective tube liner **106A-N** is formed as a cladding with lower hydrogen permeability that sheaths the respective moderator element **103A-N** from the nuclear fuel tile array **114** of nuclear fuel tiles **104A-N**. Hence, the moderator element **103A** is advantageously surrounded by the tube liner **106A**, the moderator coolant passage **121A**, the insulator element **102A**, and then finally the nuclear fuel tile **104A**.

[**0139**] The respective moderator element **103A-N** is insulated from the nuclear fuel tile array **114** of nuclear fuel tiles **104A-N** by the respective insulator element **102A-N**. Looking at the first nuclear fuel tile **104A**, a first moderator element **103A** is disposed inside a first tube liner **106A**; and a first insulator element **102A** is disposed inside the first nuclear fuel tile **104A**. A first moderator coolant passage **121A** is disposed between the first tube liner **106A** and the first insulator element **102A**. A second moderator element **103B**, second tube liner **106B**, and second moderator coolant passage **121B** (not visible in the zoomed-in view) are disposed in a similar relationship. A first nuclear fuel tile **104B** includes a first plurality of nuclear fuel lateral facets

181A-N. Nuclear fuel lateral facet **181A** borders the first insulator element **102A**; and nuclear fuel lateral facet **181C** borders the second nuclear fuel tile **104B**. In FIG. **3**, the nuclear fuel lateral facet **181A** includes a spherical surface and the nuclear fuel lateral facet **181C** includes a planar surface.

[**0140**] Looking at the third nuclear fuel tile **104C**, a third moderator element **103C** is disposed inside a third tube liner **106C**; and a third insulator element **102C** is disposed inside the second nuclear fuel tile **104B**. A third moderator coolant passage **121C** is disposed between the third tube liner **106C** and the third insulator element **102C**. A fourth moderator element **103D**, fourth tube liner **106D**, and fourth moderator coolant passage **121D** (not visible in the zoomed-in view) are disposed in a similar relationship. The second nuclear fuel tile **104B** includes a second plurality of nuclear fuel lateral facets **191A-N**. Nuclear fuel lateral facet **191A** borders the third insulator element **102C**; and nuclear fuel lateral facet **191C** borders the first nuclear fuel tile **104A**. In the example, the nuclear fuel lateral facet **191A** includes a spherical surface and the nuclear fuel lateral facet **191C** includes a planar surface.

[**0141**] As further shown, the first plurality of nuclear fuel lateral facets **181A-N** and the second plurality of nuclear fuel lateral facets **191A-N** border each other to collectively form five fuel coolant passages **141A-E**. In the example, nuclear fuel lateral facet **181D** of the first nuclear fuel tile **104A** and nuclear fuel lateral facet **191D** of the second nuclear fuel tile **104B** each include a spherical surface to form respective portions (e.g., half rings) of a second fuel coolant passage **141B**.

[**0142**] Nuclear reactor core **101** that implements U-Mod includes the respective moderator element **103A-N** disposed inside the respective tube liner **106A-N** for hydrogen retention. The respective tube liner **106A-N** is between the respective moderator element **103A-N** and the respective moderator coolant passage **121A-N**. The respective moderator coolant passage **121A-N** is between the respective tube liner **106A-N** and the respective insulating element **102A-N**. The respective insulating element **102A-N** is between the respective moderator coolant passage **121A-N** and the respective nuclear fuel tile **104A-N**.

[**0143**] Tube liners **106A-N** can include supports for the high-temperature thermal insulator (insulator elements **102A-N**) and the low-temperature solid-phase neutron moderator (moderator elements **103A-N**). Tube liners **106A-N** provide hydrogen retention within the moderator elements **103A-N**, and a combination of moderator coolant passages **121A-N** and insulator elements **102A-N** enable the moderator elements **103A-N** to be at a temperature significantly lower than the nuclear fuel tiles **104A-N**. The tube liner **106A** is located between moderator element **103A** and the moderator coolant passage **121A**. The moderator coolant passage is located between the tube liner **106A** and the nuclear fuel tile **104A**.

[**0144**] Tube liner **106A** is formed of a hydrogen barrier material and the insulator element **102A** is formed of a low thermal conductivity material. Tube liners **106A-N** can be a continuous weave nuclear grade SiC/SiC composite closed-end tube to clad the moderator elements **103A-N**. The end-joint design can be a combined mechanical and liquid phase sintered (LPS) joint that achieves good irradiation and mechanical performance.

[0145] To implement the U-Mod system, the nuclear reactor system **100** can also include a lower temperature heat sink. For a closed-loop power cycle, the most direct method is the cold end of the power cycle. Another option is an unheated reactor inlet, where the moderator coolant **170A** comes from cool parts of the power cycle such as a reactor inlet, compressor outlet, or the cold end of the power cycle. In addition, an external heat sink, external cold sink, or a separate power cycle altogether can also be employed.

[0146] FIGS. 4A-B illustrate a first interlocking geometry pattern **400** of the insulator element array **112** of insulator elements **102A-N**, moderator element array **113** of moderator elements **103A-N**, and nuclear fuel tile array **114** of nuclear fuel tiles **104A-N**. In the first interlocking geometry pattern **400** of FIGS. 4A-B, nineteen insulator elements **102A-N**, nineteen moderator elements **103A-N**, forty-two nuclear fuel tiles **104A-N**, nineteen moderator coolant passages **121A-N**, and seventy-eight completed fuel coolant passages **141A-N** are shown.

[0147] Nuclear fuel tiles **104A-N** have an optimized geometry with a continuous interlocking pattern to minimize gaps between nuclear fuel tiles **104A-N** and maximize nuclear reactor core **101** heat transfer during accident scenarios. The optimized geometry maximizes heat transfer from the nuclear fuel into the nuclear fuel coolant **170B** and into the surrounding structures, enables heat conduction between the nuclear fuel tiles **104A-N**, integrates with in-core high performance moderators, and implements TRISO fuel particles **151A-N** embedded in a high-temperature matrix **152**. TRISO fuel particles **151A-N** suspended in the high-temperature matrix **152** of the nuclear fuel tiles **104A-N** provide high gas outlet temperatures for power generation and/or process heat while limiting temperatures in the moderator elements **103A-N**.

[0148] As shown, the nuclear fuel tile **104A** includes a plurality of nuclear fuel lateral facets **181A-L** that are discontinuous to form an outer periphery **186** of the respective nuclear fuel tile **104A-N**. As used herein, “discontinuous” means that the outer periphery **186** formed by the nuclear fuel lateral facets **181A-N** in aggregate do not form a continuous round (e.g., circular or oval) perimeter. The outer periphery **186** includes a plurality of planar, aspherical, spherical, or freeform surfaces. As used herein, a “freeform surface” does not have rigid radial dimensions, unlike regular surfaces, such as a planar surface; or an aspherical or spherical surface (e.g., cylinder, conical, quadric surfaces).

[0149] Nuclear fuel lateral facets **181A-C**, **181E-G**, **181I-K** form tile interface walls **182A-C**, respectively. Nuclear fuel lateral facets **181D**, **181H**, and **181L** form insulator element interface walls **183A-C**, respectively. A respective tile interface wall **182A-C** alternates with a respective insulator element interface wall **183A-C** to form an alternating pattern of the outer periphery **186**. The respective tile interface wall **182A-C** includes a planar surface.

[0150] As shown in FIG. 4B, the tile interface wall **182A** includes two nuclear fuel lateral facets **181A**, **181C** on opposing ends with a nuclear fuel lateral facet **181B** extending between. In the example of tile interface wall **182A**, the two nuclear fuel lateral facets **181A**, **181C** (e.g., first and second end segments) are on opposing ends and each include a planar surface. The nuclear fuel lateral facet **181B** (e.g. central segment) extending between includes an aspherical or spherical surface. Tile interface walls

182AB-C are formed with a respective geometry like that of tile interface wall **182A**. The respective tile interface wall **182A-C** borders the other respective nuclear fuel tile **104A-N**. The respective insulator element interface wall **183A-C** borders the respective insulator element **102A-N**. The respective insulator element interface wall **183A-C** includes an aspherical or spherical surface.

[0151] As noted above, graphite-moderated nuclear reactors are generally very large. Making a graphite-moderator nuclear reactor smaller requires nuclear reactor core refueling, as the core contains little fissile material. Frequent refueling is incompatible with a compact nuclear reactor, which has no onsite refueling. U-Mod is implemented by encasing the moderator elements **103A-N** (e.g., ZrH or Be-based low-temperature solid-phase moderator) with insulator elements **102A-N** (e.g., radiation-tolerant high-temperature material) to increase the structural strength of the low-temperature solid-phase moderator and thermally insulate to maintain acceptably low-temperatures. This enables the nuclear fuel tiles **104A-N**(S-block) as a larger volume of the nuclear reactor core **101** rather than the moderator elements **103A-N**, which enables longer lifetimes from the compact nuclear reactor core **101**. The smaller nuclear reactor core **101** size enabled by U-Mod allows a more compact form factor than graphite-moderated systems and can also reduce construction costs and increase transportability while operating at high power densities.

[0152] Another benefit of U-Mod is the enablement of a small nuclear reactor system **100** that can utilize low-assay low-enriched uranium (LEU) fuel (generally <10% ²³⁵U) in the TRISO fuel particles **151A-N**. Many new advanced reactor systems require high-assay low-enriched uranium fuel (generally >10% ²³⁵U), which is not currently produced and has more proliferation-related concerns.

[0153] FIG. 5 illustrates a second interlocking geometry pattern **500** of the insulator element array **112** of insulator elements **102A-N**, moderator element array **113** of moderator elements **103A-N**, and nuclear fuel tile array **114** of nuclear fuel tiles **104A-N**. In FIG. 5, the nuclear fuel lateral facets **181A-F** of the respective nuclear fuel tile **104A-N** alternate between bordering the respective insulator element **102A-N** and the other respective nuclear fuel tile **104A-N**.

[0154] In the second interlocking geometry pattern **500** of FIG. 5, seven insulator elements **102A-G**, seven moderator elements **103A-G**, twenty-four nuclear fuel tiles **104A-X**, seven moderator coolant passages **121A-G**, and twenty-four fuel coolant passages **141A-X** are shown. The respective insulator element **102A-G** is shaped as a tube or a pipe. The respective insulator element **102A-N** can include silicon carbide. The respective insulator element **102A-G** lines the respective insulating interface **183A-C** wall of two or more nuclear fuel tiles **104A-N**. Insulator elements **102A-G** can be nuclear grade SiC or SiC composite closed-end tube to clad the moderator elements **103A-G**.

[0155] As shown, the respective insulator element **102A-G** is shaped as cylinder that includes a respective moderator opening **195A-G** (e.g. space or hole) of a plurality of moderator openings **195A-G** formed longitudinally therein. The respective moderator element **103A-G** is disposed inside the respective moderator opening **195A-G**. The respective moderator element **103A-N** can include beryllium, such as, for example, beryllium carbide or beryllium oxide.

[0156] In a first U-Mod example, the moderator elements **103A-G** are formed of a high volume fraction chopped-fiber beryllium carbide (Be_2C) composite infiltrated with beryllium. Sintering of Be_2C —Be composite can take advantage of the exothermic reaction between Be and C and uses small amounts of Si to enhance wetting. By sintering, the moderator elements **103A-G** are formed as a Be-metal matrix that can be comprised of Be in a Be_2C web. The Be-metal matrix includes a matrix volume fraction set (from between approximately zero to approximately 50%). In a second U-Mod example, the solid-phase moderator of the moderator elements **103A-G** includes ZrH, which can be shaped as a cylindrical pellet clad in structurally strong insulator elements **102A-G**. The moderator elements **103A-G** are cooled in separate cooling path from the nuclear fuel tiles **104A-X** by moderator coolant passages **121A-G**.

[0157] Nuclear fuel tiles **104A-N** formed of TRISO fuel particles **151A-N** embedded in the high-temperature matrix **152** can be formed through direct current sintering (DCS). Nuclear fuel tiles **104A-N** achieve high levels of fuel burnup ($>>100$ GWd/tonne), operate at extreme temperatures (e.g., approximately $1,200^\circ\text{C}$.), and have excellent behavior under irradiation. Nuclear fuel tiles **104A-N** can include greater than 50% volume packing fraction of TRISO fuel particles **151A-N** within the high-temperature matrix **152**. TRISO fuel particles **151A-N** dispersed in the high-temperature matrix **152** can include a fuel kernel coated by alternating or sequential layers of a low density carbon, a binary carbide layer, and a pyrolytic graphite. Binary carbide layer can include silicon carbide (SiC) or a refractory metal carbide, such as titanium carbide (TiC), zirconium carbide (ZrC), niobium carbide (NbC), or a combination thereof. When the binary carbide layer is formed of the refractory metal carbide, several advantages can be provided. First the refractory metal carbide that forms the binary carbide layer allows the TRISO fuel particles **151A-N** to provide multiple barriers of protection that retain the fissile fuel kernel for ultra-high temperature operation (>3000 degrees Kelvin). The refractory metal carbide also attenuates fission products to reduce irradiation damage of the high-temperature matrix **152**. The refractory carbide layer thus behaves as a pressure vessel layer that traps fission products to prevent escape into the nuclear fuel coolant **170B** (e.g., propellant, such as hydrogen) in the NTP nuclear system **100**, or interaction with the high-temperature matrix **152**.

[0158] FIG. 6 illustrates a third interlocking geometry pattern **600** of the insulator element array **112** of insulator elements **102A-N**, moderator element array **113** of moderator elements **103A-N**, and nuclear fuel tile array **114** of nuclear fuel tiles **104A-N**. In the example of FIG. 6, two insulator elements **102A-B**, two moderator elements **103A-B**, ten nuclear fuel tiles **104A-J**, two moderator coolant passages **121A-B**, and thirty-two completed fuel coolant passages **141A-N** are shown. In the third interlocking geometry pattern **600** of FIG. 6, the respective nuclear fuel tile **104A-J** includes two tile interface walls **182A-B** and two insulator element interface walls **183A-B**. Each of the tile interface walls **182A-B** is formed of ten nuclear fuel lateral facets **181A-J** and **181M-V**, respectively, which are an alternating pattern of a spherical or aspherical surface with a planar surface. Each of the insulator element interface walls **183A-B** is formed of two nuclear fuel lateral facets

181K-L and **181W-X**, respectively, which are likewise an alternating pattern of a spherical or aspherical surface with a planar surface.

[0159] As shown in FIG. 6, the respective insulator element **102A-B** is shaped as a prism that includes a respective moderator opening **195A-B** formed longitudinally therein. The respective moderator element **103A-B** is disposed inside the respective moderator opening **195A-B**. The respective insulator element **102A-B** includes a plurality of insulator element lateral facets **196A-N** (e.g., thirty are shown) that in aggregate shape the respective insulator element **102A-N** as the prism, which is a triangular prism in the example. The insulator element lateral facets **196A-N** are planar, aspherical, spherical, or freeform surfaces. The prism includes a plurality of insulator element border walls **198A-C**, e.g., three insulator element border walls **198A-C** are shown in the triangular prism example. Each of the insulator element border walls **198A-C** includes a subset of the insulator element lateral facets **196A-N**.

[0160] The insulator element border walls **198A-C** include an alternating pattern of a planar surface with an aspherical or spherical shaped surface. In the example of FIG. 6, ten insulator element lateral facets **196A-J** form a first insulator element border wall **198A** with the alternating pattern of the planar shaped surface with the aspherical or spherical shaped surface.

[0161] FIG. 7 is a reactor outlet temperature graph **700** illustrating a maximum reactor outlet temperature **710** in degrees Celsius and a nominal power level **705** in megawatts (MW). Reactor outlet temperature graph **700** compares a baseline nuclear reactor core **720** with an architecture for the nuclear reactor core **101** that implements Basic S-Block and U-Mod **730** like that shown in FIG. 5 and Advanced (Adv.) S-Block and U-Mod **740** like that shown in FIG. 6. As shown in the reactor outlet temperature graph **700**, compared to the baseline nuclear reactor core **720**, a nuclear reactor core **101** that implements S-Block and U-Mod **730**, **740** achieves broader ranges of maximum reactor outlet temperature **710** and nominal power level **705** while maintaining safety, reliability, compactness, and efficiency. As shown, Advanced S-Block and U-Mod **740** can operate either at approximately 70 MWth with outlet temperatures of 500°C ., or at 10 MWth, close to 1000°C . Both the Basic S-Block and U-Mod **730** and Advanced S-Block and U-Mod **740** architectures enable better in-nuclear reactor core **101** heat transfer, average nuclear reactor core **101** specific heat, and increase the ability to remove heat from the nuclear reactor core **101**.

[0162] FIG. 8 is a U-Mod physical property table **800** of two candidate high-temperature thermal insulators **802A-B** to form insulator elements **102A-N** and six candidate low-temperature solid-phase moderators **803A-F** to form moderator elements **103A-N** as compared to graphite **810**. As shown in the U-Mod physical property table **800**, all of the low-temperature solid-phase moderators **803A-F** are significantly better neutron moderators than graphite **810** by slowing down power. High-temperature thermal insulators **802A-B** are not better neutron moderators than graphite by slowing down power. By combining the high-temperature thermal insulators **802A-B** with the low-temperature solid-phase moderators **803A-F**, superior engineered performance is achieved by U-Mod. Two engineered structures for U-Mod are superior. In the first engineered U-Mod structure, the moderator elements **103A-N** are formed of a solid-phase

moderator **803A** that includes zirconium hydride (ZrH) **803A** that is encased in a rigidly clad high-temperature thermal insulator **802A** formed of a nuclear-grade chemical vapor deposition (CVD) SiC composite cladding. In the second engineered U-Mod structure, the moderator elements **103A-N** are formed of a solid-phase moderator **803B** that includes beryllium carbide (Be₂C) **803B** that is similarly encased in high-temperature thermal insulator **802A** formed of a nuclear-grade SiC composite cladding.

[**0163**] FIG. **9** is a thermal analysis graph **900** of the nuclear reactor core **101** that implements S-Block and U-Mod showing how temperature varies **910** depending on axial distance **905**. As shown in the thermal analysis graph **900**, the nuclear fuel tile maximum temperature **904** of the nuclear fuel tiles **104A-N**(S-Blocks) is approximately 1,200 degrees Kelvin at an axial distance **905** between approximately 0 centimeters to 0.3 centimeters. The nuclear fuel coolant maximum temperature **970B** of the nuclear fuel coolant **170B** is approximately 1,150 degrees Kelvin at an axial distance **905** between approximately 0 centimeters to 0.1 centimeters. The moderator element maximum temperature **903** of the moderator elements **103A-N** (U-Mod) is approximately 800 degrees Kelvin at an axial distance **905** between approximately 0.3 centimeters to 0.7 centimeters. The moderator coolant maximum temperature **970A** of the moderator coolant **170A** is approximately 750 degrees Kelvin at an axial distance **905** between approximately 0.5 centimeters to 0.7 centimeters. Hence, the S-Block architecture of the nuclear fuel tiles **104A-N** increases heat transfer between the nuclear fuel tiles **104A-N** to increase efficiency and the U-Mod architecture of the moderator elements **103A-N** and the insulator elements **102A-N** increases the ability to remove heat from the moderator elements **103A-N**.

[**0164**] FIG. **10** is a depletion graph **1000** of two different nuclear reactor cores **101A-B** that implement S-Block and U-Mod. As shown, the coefficient k-effective (k-eff) **1010** over the lifetime **1005** measured in years of the nuclear reactor core **101** is improved. K-eff **1010**, also known as the neutron multiplication factor, characterizes the criticality state of the fissile material in the TRISO fuel particles **151A-N** suspended in the high-temperature matrix **152** of the nuclear fuel tiles **104A-N**. Generally K-eff=number of neutrons produced/number of neutrons lost (through leakage or absorption). If K-eff **1010** is greater than or equal to 1, only then can the nuclear fission chain reaction can be sustained. As shown, Basic S-Block and U-Mod **730** enables a nuclear reactor core **101A** with a lifetime **1005A** of approximately 10 years. Advanced S-Block and U-Mod **740** enables a nuclear reactor core **101B** with a lifetime **1005B** of approximately 15 years. Both Basic S-Block and U-Mod **730** and Advanced S-Block and U-Mod **740** enable a large power density rendering the nuclear reactor system **1000** commercially viable.

[**0165**] FIG. **11** is a nuclear reactor core performance and properties comparison table **1101** comparing nuclear reactor mass **1105**, power level **1106**, power per mass **1107**, outlet temperature **1108**, and uranium 235 (U-235) enrichment **1109** of six different nuclear reactor systems **1100A-F**. As measured by nuclear reactor mass **1105** in kilograms (kg), power level **1106** in kilowatt-electric (kWe), power per mass **1107** in Watts electric per kilogram (We/kg), and outlet temperature **1108** in degrees Kelvin (K), a first nuclear reactor system **1100A** that implements Basic S-Block and

U-Mod **730** within the nuclear reactor core **101** achieves slightly improved performance compared to the JIMO nuclear reactor system **1100D**. Importantly, this slightly improved performance achieved with Basic S-Block and U-Mod **730** is achieved with U-235 enrichment **1109A** that is low-enriched uranium (LEU), and not the highly-enriched uranium (HEU) U-235 enrichment implemented in the JIMO nuclear reactor system **1100D**. The JIMO nuclear reactor system **1100D** is described in National Aeronautics and Space Administration "Prometheus Project Final Report" 982-R120461, the entirety of which is incorporated by reference herein.

[**0166**] A second nuclear reactor system **1100B** that implements Advanced S-Block and U-Mod **740** in the nuclear reactor core **101** has a nuclear reactor mass **1105B** that is the same as the nuclear reactor mass **1105E** of the KiloPower Derived nuclear reactor system **1100C**, but Advanced S-Block and U-Mod **740** majorly improves power level **1106B**, power per mass **1107B**, and outlet temperature **1108B**. The KiloPower Derived nuclear reactor system **1100C** is described in Patrick McClure, David Poston, "Design and Testing of Small Nuclear Reactors for Defense and Space Applications, Invited Talk to ANS Trinity Section, the entirety of which is incorporated by reference herein.

[**0167**] The nuclear reactor mass **1105A** of Basic S-Block and U-Mod **730** is merely 1,500 kg and the nuclear reactor mass **1105B** of Advanced S-Block and U-Mod **740** is 3,000 kg. Like S-Block and U-Mod, the Megapower nuclear reactor system **1100F** implements LEU U-235 enrichment **1109F**; however, the nuclear reactor mass **1105F** is nearly 22,000 kilograms with a power per mass **1107F** of 91 We/kg compared to an improved power per mass **1107A** of 100 We/kg for Basic S-Block and U-Mod **730** and a power per mass **1107B** of 333 We/kg for Advanced S-Block and U-Mod **740**. The Megapower nuclear reactor system **1100F** is also described in Patrick McClure, David Poston, "Design and Testing of Small Nuclear Reactors for Defense and Space Applications," Invited Talk to ANS Trinity Section, the entirety of which is incorporated by reference herein.

[**0168**] Finally, the NASA Fission Surface System nuclear reactor system **1100C** is described in David I. Poston, "Reference Reactor Module Design for NASA's Lunar Fission Surface Power System," Proceedings of Nuclear and Emerging Technologies for Space **2009**, Atlanta, Ga. June 2009, the entirety of which is incorporated by reference herein. Overall, the NASA Fission Surface System nuclear reactor system **1100D** has inferior performance and properties, including nuclear reactor mass **1105C**, power level **1106C**, power per mass **1107C**, outlet temperature **1108C**, and uranium 235 (U-235) enrichment **1109C** compared to both Basic S-Block and U-Mod **730** and Advanced S-Block and U-Mod **740** even though the NASA Fission Surface System utilizes HEU U-235 enrichment **1109C**.

[**0169**] The nuclear reactor core performance and properties comparison table **1101** of FIG. **11** demonstrates that the S-Block and U-Mod technologies implemented in the architecture of the nuclear reactor core **101** achieve relatively low nuclear reactor mass **1105**, high power level **1106**, high power per mass **1107**, and a high outlet temperature **1108** even with LEU U-235 enrichment. To summarize, S-Block and U-Mod enhance improve safety, reliability, heat transfer, efficiency, and compactness of the nuclear reactor core **101**.

[0170] The scope of protection is limited solely by the claims that now follow. That scope is intended and should be interpreted to be as broad as is consistent with the ordinary meaning of the language that is used in the claims when interpreted in light of this specification and the prosecution history that follows and to encompass all structural and functional equivalents. Notwithstanding, none of the claims are intended to embrace subject matter that fails to satisfy the requirement of Sections 101, 102, or 103 of the Patent Act, nor should they be interpreted in such a way. Any unintended embracement of such subject matter is hereby disclaimed.

[0171] It will be understood that the terms and expressions used herein have the ordinary meaning as is accorded to such terms and expressions with respect to their corresponding respective areas of inquiry and study except where specific meanings have otherwise been set forth herein. Relational terms such as first and second and the like may be used solely to distinguish one entity or action from another without necessarily requiring or implying any actual such relationship or order between such entities or actions. The terms “comprises,” “comprising,” “includes,” “including,” “has,” “having,” “with,” “formed of,” or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises or includes a list of elements or steps does not include only those elements or steps but may include other elements or steps not expressly listed or inherent to such process, method, article, or apparatus. An element preceded by “a” or “an” does not, without further constraints, preclude the existence of additional identical elements in the process, method, article, or apparatus that comprises the element.

[0172] In addition, in the foregoing Detailed Description, it can be seen that various features are grouped together in various examples for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed examples require more features than are expressly recited in each claim. Rather, as the following claims reflect, the subject matter to be protected lies in less than all features of any single disclosed example. Thus, the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separately claimed subject matter.

[0173] While the foregoing has described what are considered to be the best mode and/or other examples, it is understood that various modifications may be made therein and that the subject matter disclosed herein may be implemented in various forms and examples, and that they may be applied in numerous applications, only some of which have been described herein. It is intended by the following claims to claim any and all modifications and variations that fall within the true scope of the present concepts.

1. A nuclear reactor system comprising:

a nuclear reactor core including:

- an insulator element array of insulator elements;
- a moderator element array of moderator elements, wherein a respective moderator element is formed of a low-temperature solid-phase moderator disposed inside a respective insulator element; and

a nuclear fuel tile array of nuclear fuel tiles, wherein a respective nuclear fuel tile includes a plurality of nuclear fuel lateral facets that border the respective insulator element or another respective nuclear fuel tile;

wherein the respective moderator element is insulated from the nuclear fuel tile array of nuclear fuel tiles by the respective insulator element

2. The nuclear reactor system of claim 1, wherein: the nuclear reactor core further includes a plurality of tube liners formed of a hydrogen barrier material; and the respective moderator element is disposed inside a respective tube liner for hydrogen retention.
3. The nuclear reactor system of claim 2, further comprising a plurality of moderator coolant passages, wherein: the respective tube liner is surrounded by a respective moderator coolant passage; and the respective moderator coolant passage is surrounded by the respective insulator element.
4. The nuclear reactor system of claim 3, wherein: the respective tube liner is between the respective moderator element and the respective moderator coolant passage; and the respective moderator coolant passage is between the respective tube liner and the respective insulating element.
5. The nuclear reactor system of claim 3, wherein: the respective insulating element is between the respective moderator coolant passage and the respective nuclear fuel tile.
6. The nuclear reactor system of claim 2, wherein: the respective tube liner is formed as a cladding that sheaths the respective moderator element.
7. The nuclear reactor system of claim 6, wherein: the cladding includes a hermetically sealed container; and the low-temperature solid-phase moderator material forming the respective moderator element is disposed inside the hermetically sealed container.
8. The nuclear reactor system of claim 6, wherein: the respective tube liner is formed as a coating on the respective moderator element; and the low-temperature solid-phase moderator material forming the respective moderator element is disposed inside the coating.
9. The nuclear reactor system of claim 2, wherein: the hydrogen barrier material includes Al_2O_3 , SiC, ZrC, MgO, Mo, W, Cu, Ni, Cr, or a combination thereof.
10. The nuclear reactor system of claim 1, wherein: each of the insulating elements is formed of a high-temperature thermal insulator; and the high-temperature thermal insulator includes low density SiC, stabilized zirconium oxide, aluminum oxide, low density ZrC, low density carbon, or a combination thereof.
11. The nuclear reactor system of claim 1, wherein: the low-temperature solid-phase moderator includes MgH_x , YH_x , ZrH_x , CaH_x , ZrO_x , CaO_x , BeO_x , BeC_x , Be, enriched boron carbide, $^{11}B_4C$, CeH_x , LiH_x , or a combination thereof.
12. The nuclear reactor system of claim 1, wherein: the respective insulator element is shaped as a prism or a cylinder that includes a moderator opening formed longitudinally therein; and the respective moderator element is disposed inside the moderator opening.
13. The nuclear reactor system of claim 12, wherein: the respective insulator element includes a plurality of insulator element lateral facets that in aggregate shape the respective insulator element as the prism.

14. The nuclear reactor system of claim 13, wherein: the respective insulator element is shaped as the prism; the prism includes a plurality of insulator element border walls; and each of the insulator element border walls includes a subset of the insulator element lateral facets.
15. The nuclear reactor system of claim 14, wherein: the insulator element lateral facets are planar, aspherical, spherical, or freeform surfaces.
16. The nuclear reactor system of claim 15, wherein: the insulator element border walls include an alternating pattern of a planar surface with an aspherical or spherical surface.
17. The nuclear reactor system of claim 14, wherein: the prism is a triangular prism; and the respective insulator element includes three insulator element border walls.
18. The nuclear reactor system of claim 1, wherein: each of the nuclear fuel tiles is formed of a fuel compact comprised of coated fuel particles embedded inside a high-temperature matrix; and the high-temperature matrix includes silicon carbide, zirconium carbide, titanium carbide, niobium carbide, tungsten, molybdenum, or a combination thereof.
19. The nuclear reactor system of claim 18, wherein: the coated fuel particles includes tristructural-isotropic (TRISO) fuel particles or bistructural-isotropic (BISO) fuel particles.
20. The nuclear reactor system of claim 1, wherein: the plurality of nuclear fuel lateral facets are discontinuous to form an outer periphery of the respective nuclear fuel tile.
21. The nuclear reactor system of claim 20, wherein: the outer periphery includes a plurality of planar, aspherical, spherical, or freeform surfaces.
22. The nuclear reactor system of claim 1, wherein: the nuclear fuel lateral facets alternate between bordering the respective insulator element and the other respective nuclear fuel tile.
23. The nuclear reactor system of claim 1, wherein: the nuclear fuel lateral facets include a plurality of tile interface walls and a plurality of insulator element interface walls; and a respective tile interface wall alternates with a respective insulator element interface wall to form an alternating pattern of the outer periphery.
24. The nuclear reactor system of claim 23, wherein: the respective tile interface wall includes a planar surface.
25. The nuclear reactor system of claim 23, wherein: the respective tile interface wall includes two nuclear fuel lateral facets on opposing ends with a nuclear fuel lateral facet extending between; the two nuclear fuel lateral facets on opposing ends include a planar surface; and the nuclear fuel lateral facet extending between includes an aspherical or spherical surface.
26. The nuclear reactor system of claim 23, wherein: the respective tile interface wall borders the other respective nuclear fuel tile; and the respective insulator element interface wall borders the respective insulator element.
27. The nuclear reactor system of claim 23, wherein: the respective insulator element interface wall includes an aspherical or spherical surface.
28. The nuclear reactor system of claim 27, wherein: the respective insulator element is shaped as a tube or a pipe; and the respective insulator element lines the respective insulating interface wall of two or more nuclear fuel tiles.
29. The nuclear reactor system of claim 1, wherein: the respective insulator element with the respective moderator element disposed inside includes a respective moderator coolant passage formed therein.
30. The nuclear reactor system of claim 29, wherein: the respective moderator coolant passage is located between the respective moderator element and the respective insulator element.
31. The nuclear reactor system of claim 29, wherein: the respective moderator coolant passage is a flattened ring shaped opening.
32. The nuclear reactor system of claim 29, wherein: the respective moderator coolant passage flows a coolant through to both: (i) heat the coolant, and (ii) cool the respective moderator element; the respective nuclear fuel tile includes one or more fuel coolant passages formed therein for subsequent heating of the coolant by the respective nuclear fuel tile after the coolant flows through the moderator coolant passage; and the coolant is a gas or a liquid.
33. The nuclear reactor system of claim 29, wherein: the respective moderator coolant passage flows a moderator coolant through to both: (i) heat the moderator coolant, and (ii) cool the respective moderator element; and the respective nuclear fuel tile includes one or more nuclear fuel coolant passages formed therein that flow a nuclear fuel coolant to heat the nuclear fuel coolant via direct contact with the respective nuclear fuel tile.
34. The nuclear reactor system of claim 33, wherein: the moderator coolant that flows through the respective moderator coolant passage is in a moderator coolant loop dedicated to the moderator element array of moderator elements and that is thermally isolated and separated from a fuel coolant loop that includes the nuclear fuel coolant passages.
35. The nuclear reactor system of claim 34, wherein: the moderator coolant loop thermally isolates the moderator coolant from the nuclear fuel coolant to actively remove heat from the moderator elements to maintain the moderator elements at a lower temperature compared to the nuclear fuel tile array of fuel tiles during operation of the nuclear reactor core.
36. The nuclear reactor system of claim 34, wherein: the moderator coolant is different than the nuclear fuel coolant.
37. The nuclear reactor system of claim 34, wherein: the moderator coolant is a propellant for nuclear thermal propulsion; or the moderator coolant is a working fluid for nuclear electric propulsion or fission surface power.
38. The nuclear reactor system of claim 34, wherein: the moderator coolant is chemically incompatible with the plurality of nuclear fuel tiles.
39. The nuclear reactor system of claim 34, wherein: the moderator coolant loop includes a heat sink; and the moderator coolant is thermally coupled to the heat sink.

40. The nuclear reactor system of claim 39, further comprising a pump, a compressor, a blower, or a combination thereof, wherein:

the pump, the compressor, the blower, or the combination thereof flows the moderator coolant to flow through the heat sink to cool the plurality of moderator elements during operation of the nuclear reactor core.

* * * * *